1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11520600532161

Swivel castor, Welded Caster Fork, blue painted Top Plate Mounting Type, Hole spacing 129.4 x 73.8 Cast Iron Wheel Center, high quality polyurethane wheel tread, Cast Iron brown Bearing - Ball Bearing

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 87mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 114 x 159mm

Bolt Hole Spacing 129.4 x 73.8mm

Plate Hole 13 x 25.5mm

Offset 48mm

Swivel Interference 260mm

Swivel Interference 260mm

Overall Height 191mm

Swivel Radius 130mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 990kgs

Load Capacity (Static) 1482kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 7.31kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

Dimensions





Mounting

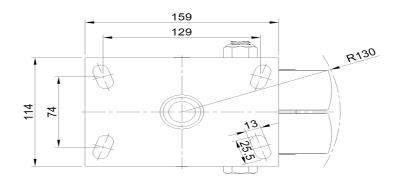

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.