# 1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

QPU (brown flat) Wheel Diameter x Wheel Width 150 x 42mm


**EAN** 

KS-11520600534341

Casters with rear brake and locking mechanism, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

#### ● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 112mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 175 x 140mm **Bolt Hole Spacing** 140x105mm Plate Hole 15mm Offset 55mm 302mm Swivel Interference Overall Height 215mm **Swivel Radius** 151mm Hardness Of Tread 92±5° Shore A Load Capacity (Dynamic) 1050kgs

Load Capacity (Dynamic) 1050kgs

Load Capacity (Static) 1620kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 10.63kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

### Dimensions





## Mounting

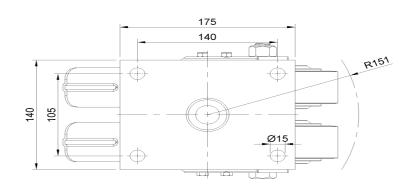

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.