1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

QPU (brown flat) Wheel Diameter x Wheel Width 150 x 42mm

EAN


KS-11520600534341

Casters with rear brake and locking mechanism, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Swivel Radius

● Imperial ○ Metric

6" Wheel Diameter

4-1/2" Wheel Width

Wheel Bearing Wheels With Ball Bearings

7" x 5-9/16" Plate Size **Bolt Hole Spacing** 5-1/2"x4-1/8" 5/8 " Plate Hole

Offset 2-3/16 " 12 " Swivel Interference 8-1/2 " Overall Height 6 "

Hardness Of Tread 92±5° Shore A 2315lbs Load Capacity (Dynamic)

Load Capacity (Static) 3571lbs

Temperature -4°F to +158°F

Swivel Caster With Rear Brake Fork Type


Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 23.4lbs Standard ISO22883


Advantages at a glance

Rolling Resistance Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

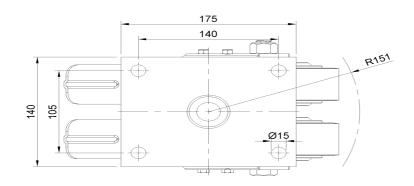

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.