



1152 Self-Align Casters Series

QPU (brown flat) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11520600534741

Front brake Caster with Self-Aligned Locking system, Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: high-quality polyurethane wheel tread  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

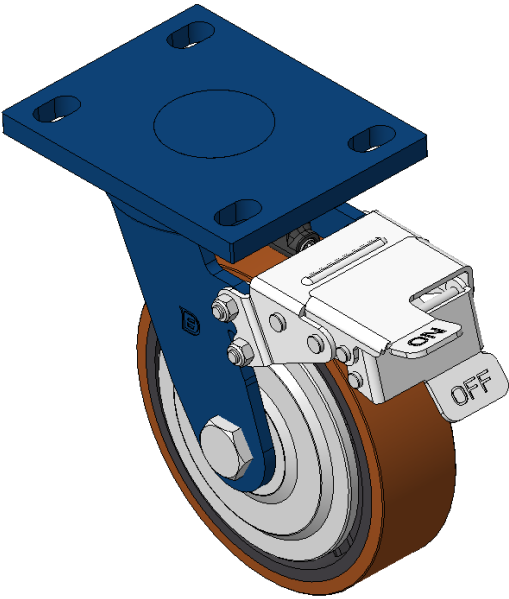

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 6 "                            |
| Wheel Width                                                            | 1-11/16 "                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 5-9/16 " x 4-3/8 "             |
| Bolt Hole Spacing                                                      | 4-5/16 " x3"                   |
| Plate Hole                                                             | 7/8 " x 9/16 "                 |
| Offset                                                                 | 1-11/16 "                      |
| Swivel Interference                                                    | 12-11/16 "                     |
| Overall Height                                                         | 7-7/8 "                        |
| Swivel Radius                                                          | 6-3/8 "                        |
| Hardness Of Tread                                                      | 92±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 1323lbs                        |
| Load Capacity (Static)                                                 | 1984lbs                        |
| Temperature                                                            | -4°F to +158°F                 |
| Fork Type                                                              | Swivel Caster With Front Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 11.3lbs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

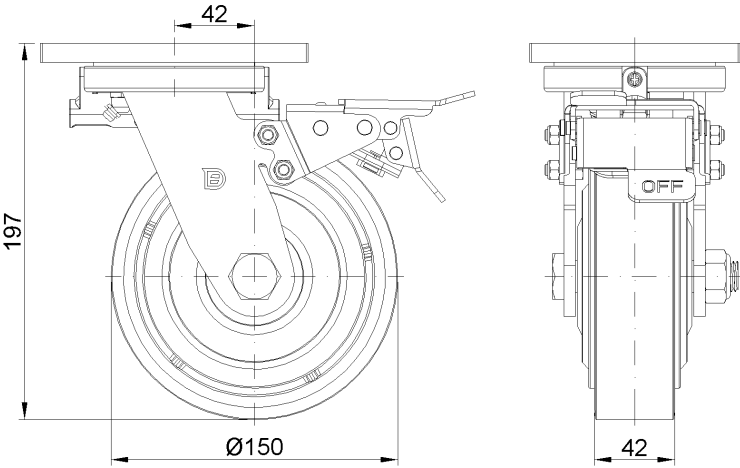

Mounting

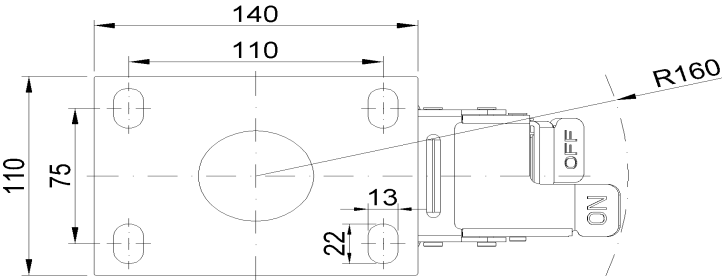

\* For any deviation between metric and imperial spec, please refer to the metric spec.