1152 Self-Align Casters Series

Dersheng Casters Keep Rolling

QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm

EAN


KS-11520600534861

Front brake Caster with Self-Aligned Locking system, Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: high-quality polyurethane wheel tread

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Offset 1-11/16 "

Offset 1-11/16 "

Swivel Interference 12-11/16 "

Overall Height 7-7/8 "

Swivel Radius 6-3/8 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1213lbs

Load Capacity (Static) 1819lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 11.1lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

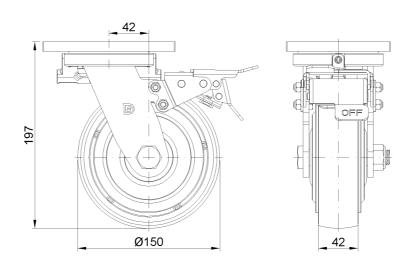

Mounting

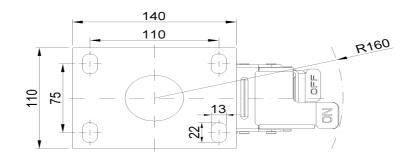

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.