1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11520600541321

Rigid Caster with Welded Caster Fork, blue-painted finish. Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing. Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown. Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

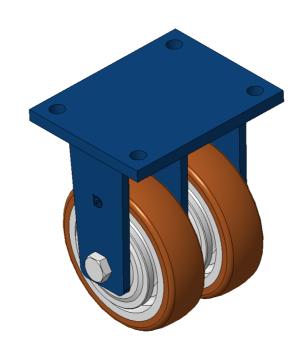

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 112mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 175 x 140mm

Bolt Hole Spacing 140x105mm

Plate Hole 15mm

Overall Height 215mm

Hardness Of Tread 92±5° Shore A

Hardness Of Tread

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

Fork Type

Stainless

92±5° Shore A

1206kgs

1809kgs

-20°C to +70°C

Rigid Caster

N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.08kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

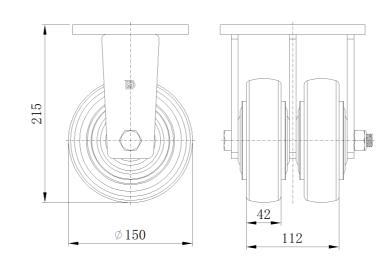

Mounting



^{*} For any deviation between metric and imperial spec, please refer to the metric spec.