



1152 Anti-Friction Caster (B Type) Series

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11520600541321

Rigid Caster with Welded Caster Fork, blue-painted finish. Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing. Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown. Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

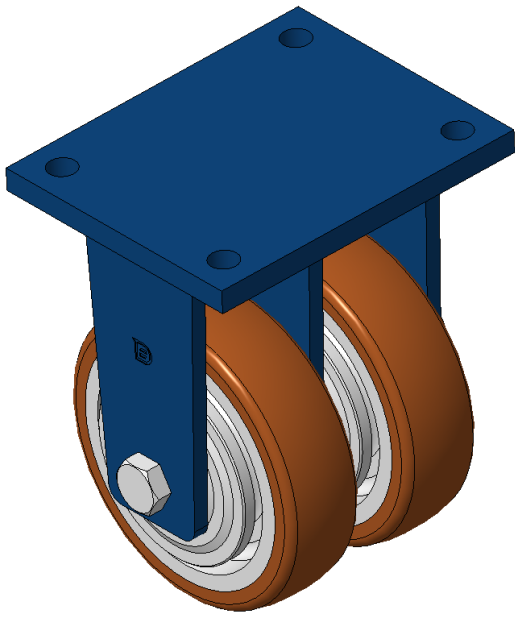

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 6 "                       |
| Wheel Width                                                            | 4-1/2 "                   |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 7 " x 5-9/16 "            |
| Bolt Hole Spacing                                                      | 5-1/2"x4-1/8"             |
| Plate Hole                                                             | 5/8 "                     |
| Overall Height                                                         | 8-1/2 "                   |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 2659lbs                   |
| Load Capacity (Static)                                                 | 3988lbs                   |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 20.0lbs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

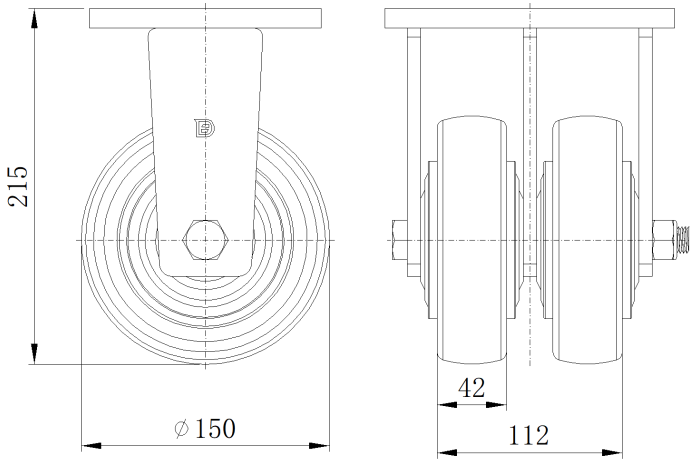

Mounting

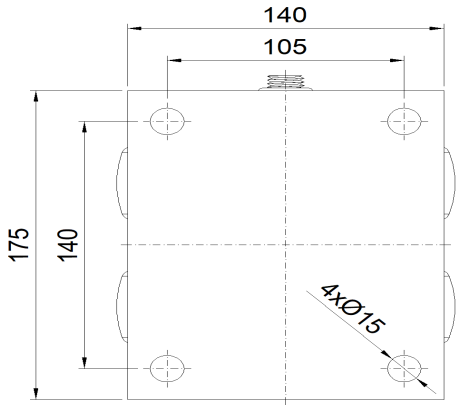

\* For any deviation between metric and imperial spec, please refer to the metric spec.