



1152 Anti-Friction Caster (B Type) Series

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11520600542321

Swivel Caster, Welded Caster Fork, blue painted surface Top Plate Mounting Type, Hole spacing 140x105 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearing - Ball Bearing, with special Anti-thread wheel cover

Wheel tread: Made of high quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

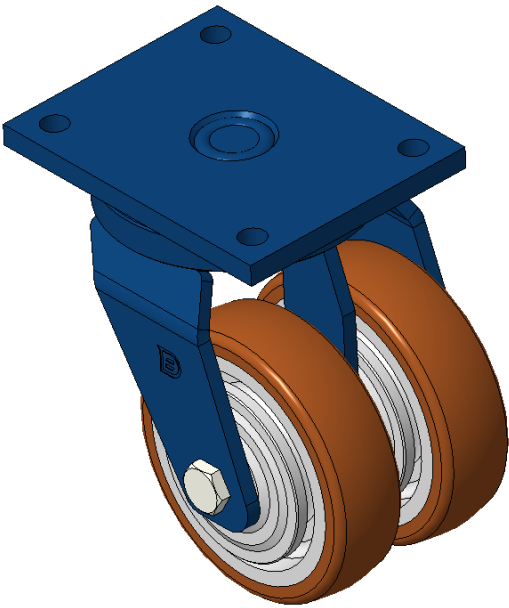

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 150mm                     |
| Wheel Width                                                            | 112mm                     |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 140 x 175mm               |
| Bolt Hole Spacing                                                      | 140x105mm                 |
| Plate Hole                                                             | 15mm                      |
| Offset                                                                 | 55mm                      |
| Swivel Interference                                                    | 290mm                     |
| Overall Height                                                         | 215mm                     |
| Swivel Radius                                                          | 145mm                     |
| Hardness Of Tread                                                      | 94±5° Shore A             |
| Load Capacity (Dynamic)                                                | 1206kgs                   |
| Load Capacity (Static)                                                 | 1809kgs                   |
| Temperature                                                            | -20°C to +80°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 10.95kgs                  |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

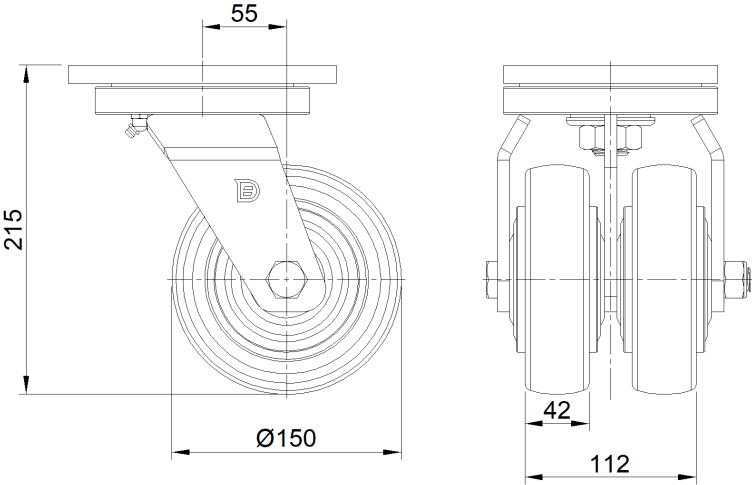

Mounting

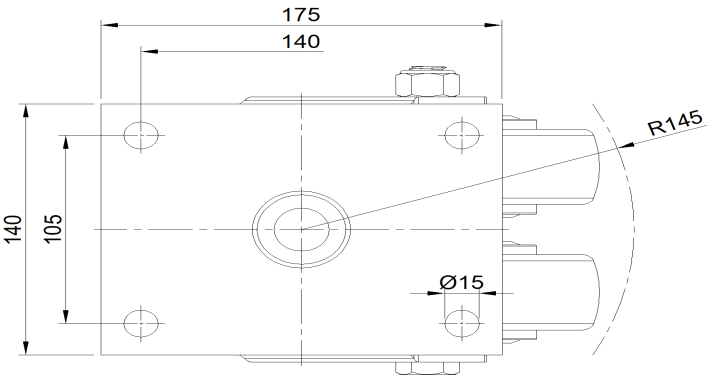

\* For any deviation between metric and imperial spec, please refer to the metric spec.