



1152 Anti-Friction Caster (B Type) Series

EQPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11520600552061

Swivel Caster with Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 129.4 x 73.8 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

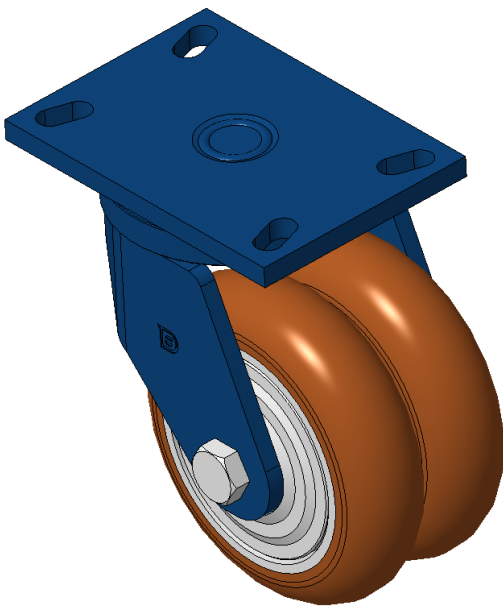

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 6 "                       |
| Wheel Width                                                            | 3-1/2 "                   |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 6-3/8 " x 4-1/2 "         |
| Bolt Hole Spacing                                                      | 5-1/8"x2-7/8"             |
| Plate Hole                                                             | 1-1/16 " x 9/16 "         |
| Offset                                                                 | 1-15/16 "                 |
| Swivel Interference                                                    | 10-3/8 "                  |
| Overall Height                                                         | 7-9/16 "                  |
| Swivel Radius                                                          | 5-3/16 "                  |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 2183lbs                   |
| Load Capacity (Static)                                                 | 3274lbs                   |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 14.2lbs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

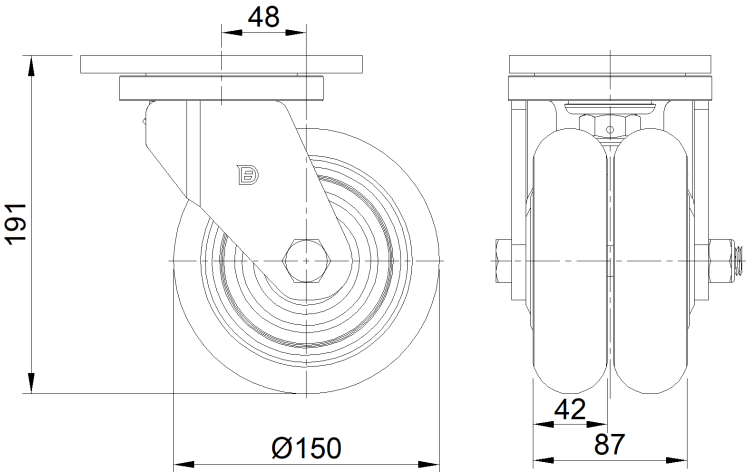

Mounting

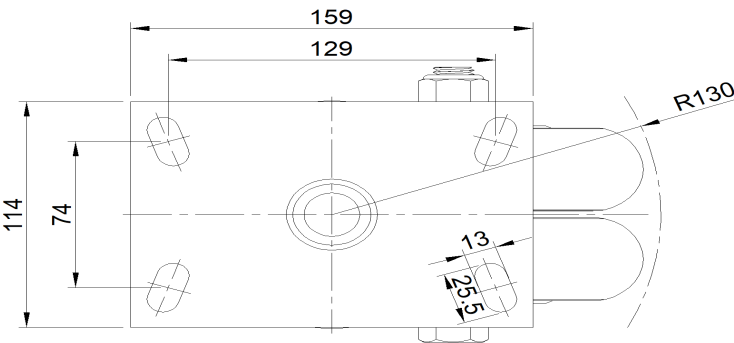

\* For any deviation between metric and imperial spec, please refer to the metric spec.