# 1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

EQPU (brown arc) Wheel Diameter x Wheel Width 150 x 42mm

EAN

KS-11520600554321

Casters with rear brake and locking mechanism, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

**Swivel Radius** 

● Imperial ○ Metric

6" Wheel Diameter

4-1/2" Wheel Width

Wheel Bearing Wheels With Ball Bearings

7" x 5-9/16" Plate Size **Bolt Hole Spacing** 5-1/2"x4-1/8" 5/8 " Plate Hole Offset 2-3/16 "

12 " Swivel Interference 8-1/2 " Overall Height 6 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 2183lbs Load Capacity (Static) 3274lbs

Temperature -4°F to +158°F

Swivel Caster With Rear Brake Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 23.8lbs Standard ISO22883


#### Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

#### **Dimensions**

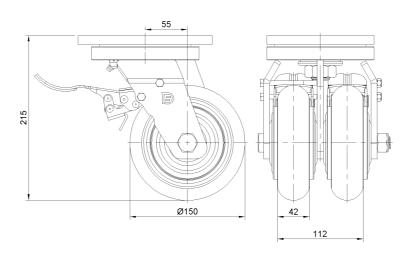

## Mounting

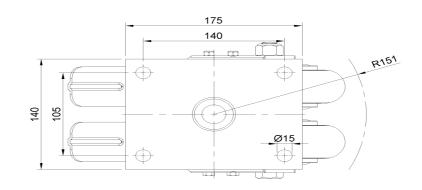

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.