



1152 Anti-Friction Caster Series

AQPU (brown) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11520600604011

Equipped with front brake, With locking system Casters, Welded Caster Fork, blue paint finish.
Base plate Mounting Type, 85x70mm Bolt Hole Spacing.
Cast aluminum core, High Quality Polyurethane Wheel Tread, Cast Iron brown.
Bearings—Ball Bearings, with Dust Cap.

Wheel Tread: Hhigh-Quality Polyurethane
Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

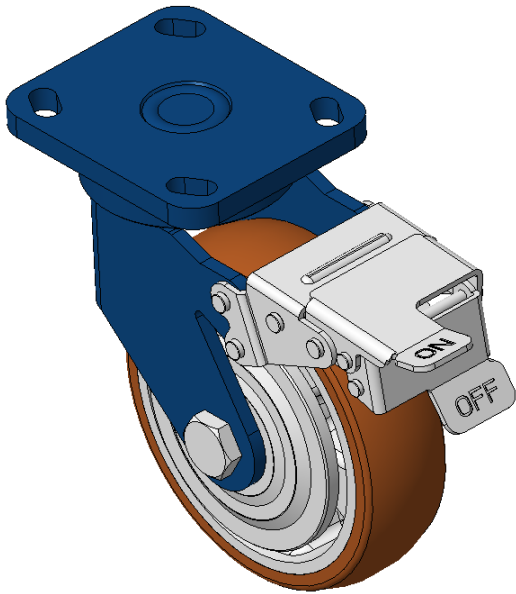

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	6 "
Wheel Width	1-11/16 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " x 3/8 "
Offset	2 "
Swivel Interference	14 "
Overall Height	7-9/16 "
Swivel Radius	7-1/16 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	992lbs
Load Capacity (Static)	1488lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	8.6lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

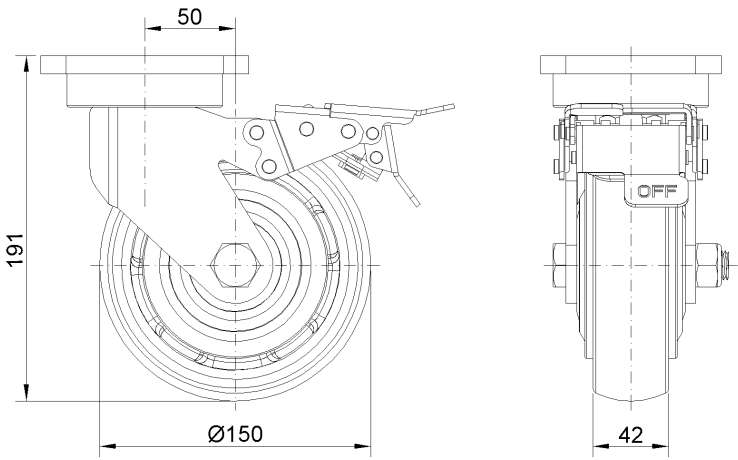

Mounting

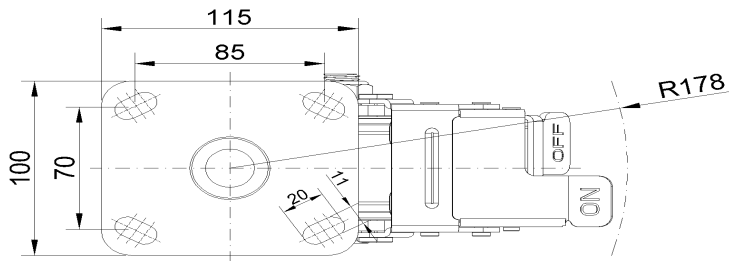

* For any deviation between metric and imperial spec, please refer to the metric spec.