1152 Anti-Friction Caster Series

Dersheng Casters Keep Rolling

VXPU (burgundy round) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11520600694071

Casters with Front Brake locking system, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron burgundy Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 042mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 42mm 320mm Swivel Interference Overall Height 197mm **Swivel Radius** 160mm Hardness Of Tread 94±5° Shore A

Load Capacity (Dynamic) 800kgs

Load Capacity (Static) 1200kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.50kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

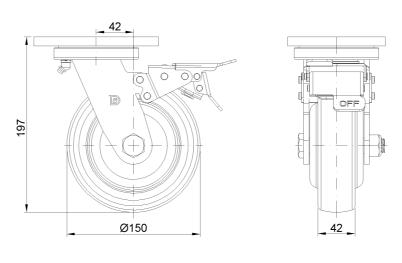

Mounting

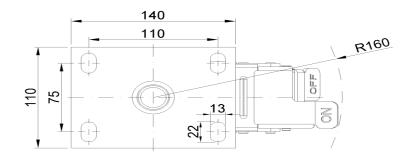

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.