# 1152 Anti-Friction Caster Series

Dersheng Casters Keep Rolling

VXPU (burgundy round) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11520600694071

Casters with Front Brake locking system, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron burgundy Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Load Capacity (Static)

Wheel Diameter 6 "

Wheel Width 1-11/16"

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 7/8 " x 9/16 "

 Offset
 1-11/16 "

 Swivel Interference
 12-11/16 "

Overall Height 7-7/8 "

Swivel Radius 6-3/8 "

Hardness Of Tread 94±5° Shore A

Load Capacity (Dynamic) 1764lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Front Brake

2646lbs

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 12.1lbs

Standard ISO22883


## Advantages at a glance

Operating Noise


Rolling Resistance • • • •

Floor Surface Preservation • • • • •

#### Dimensions



# Mounting

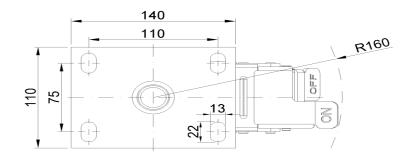

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.