



1152 Anti-Friction Caster Series

HPU Wheel (Brown-Orange-Yellow) - Wheel Diameter × Wheel Width: 150 x 75mm


A

KS-11520600982141

Swivel Caster with Welded Caster Fork, blue paint finish
Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing
Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron orange
Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

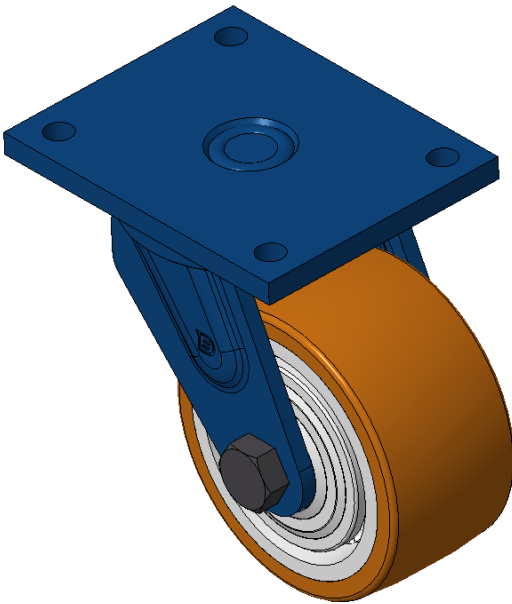

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	150mm
Wheel Width	75mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	175 x 140mm
Bolt Hole Spacing	140x105mm
Plate Hole	15mm
Offset	55mm
Swivel Interference	266mm
Overall Height	200mm
Swivel Radius	133mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	1000kgs
Load Capacity (Static)	1500kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	8.07kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

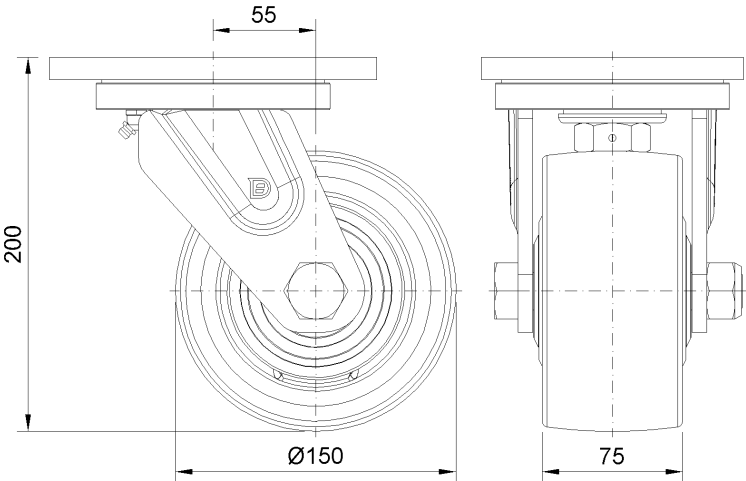

Mounting

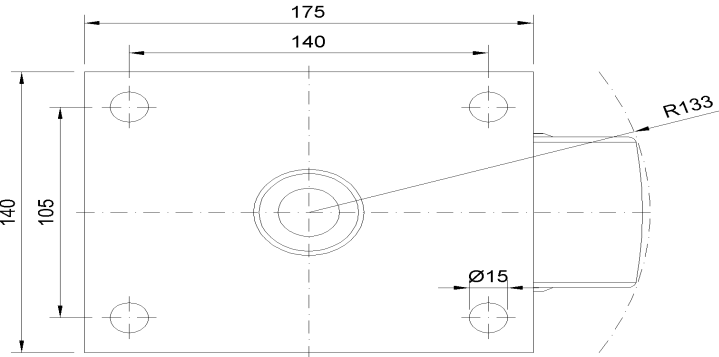

* For any deviation between metric and imperial spec, please refer to the metric spec.