

# 1152 Anti-Friction Caster (B Type) Series



Non-marking NBR Rubber (milling) Wheel Diameter x Wheel Width 200 x 44mm


EAN

KS-11520800042321

Swivel Caster, Welded Caster Fork, blue paint surface Top Plate Mounting Type device, Hole spacing 140x105 Cast Iron Wheel Center, High-Quality high-Resilient Rubber Wheel Tread, Cast Iron original color Bearing-Ball Bearing

Wheel Tread: high quality and high elastic rubber wheel surface  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

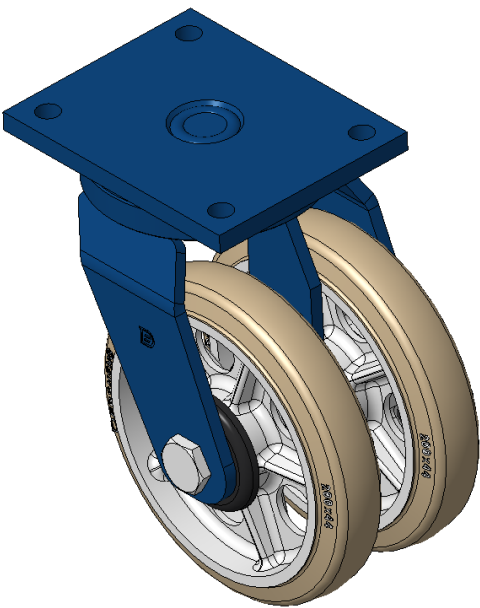

Picture may differ from original product


## Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 200mm                     |
| Wheel Width                                                            | 117mm                     |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 140 x 175mm               |
| Bolt Hole Spacing                                                      | 140x105mm                 |
| Plate Hole                                                             | 15mm                      |
| Offset                                                                 | 60mm                      |
| Swivel Interference                                                    | 346mm                     |
| Overall Height                                                         | 260mm                     |
| Swivel Radius                                                          | 173mm                     |
| Hardness Of Tread                                                      | 85±5° Shore A             |
| Load Capacity (Dynamic)                                                | 630kgs                    |
| Load Capacity (Static)                                                 | 945kgs                    |
| Temperature                                                            | -20°C to +80°C            |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 12.51kgs                  |
| Standard                                                               | ISO22883                  |


## Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

## Dimensions

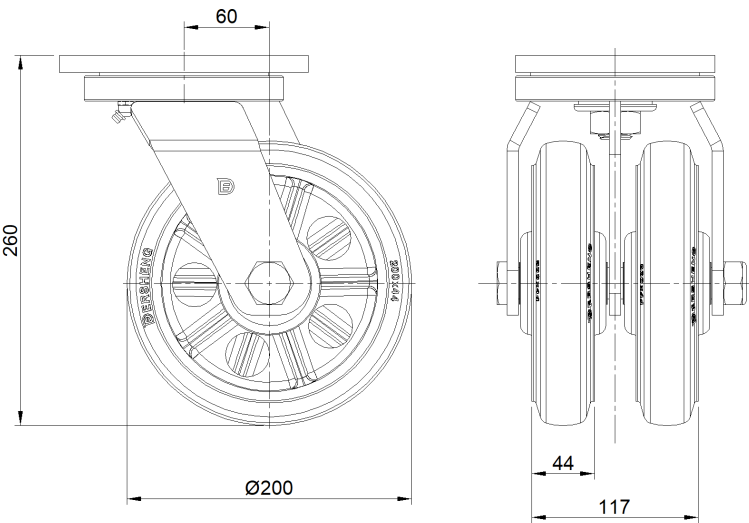

## Mounting

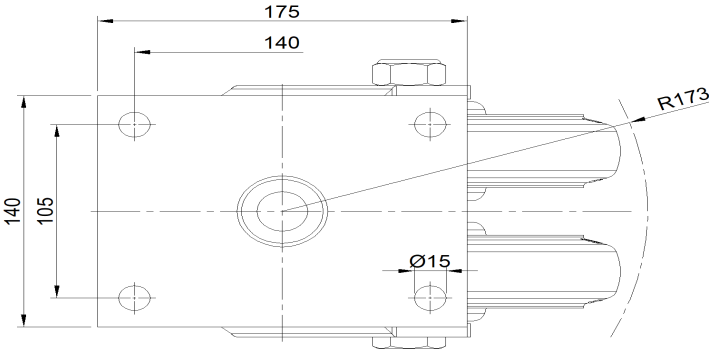

\* For any deviation between metric and imperial spec, please refer to the metric spec.