

1152 Anti-Friction Caster (B Type) Series



Non-marking NBR Rubber (milling) Wheel Diameter x Wheel Width 200 x 44mm


EAN

KS-11520800042321

Swivel Caster, Welded Caster Fork, blue paint surface Top Plate Mounting Type device, Hole spacing 140x105 Cast Iron Wheel Center, High-Quality high-Resilient Rubber Wheel Tread, Cast Iron original color Bearing-Ball Bearing

Wheel Tread: high quality and high elastic rubber wheel surface
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

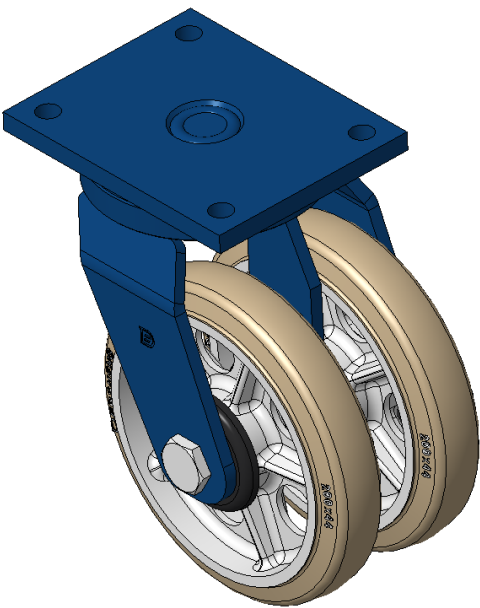

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	6 "
Wheel Width	4-5/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	5-9/16 " x 7 "
Bolt Hole Spacing	5-1/2"x4-1/8"
Plate Hole	5/8 "
Offset	2-7/16 "
Swivel Interference	13-3/4 "
Overall Height	10-3/8 "
Swivel Radius	6-15/16 "
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	1389lbs
Load Capacity (Static)	2083lbs
Temperature	-4°F to +176°F
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	27.6lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

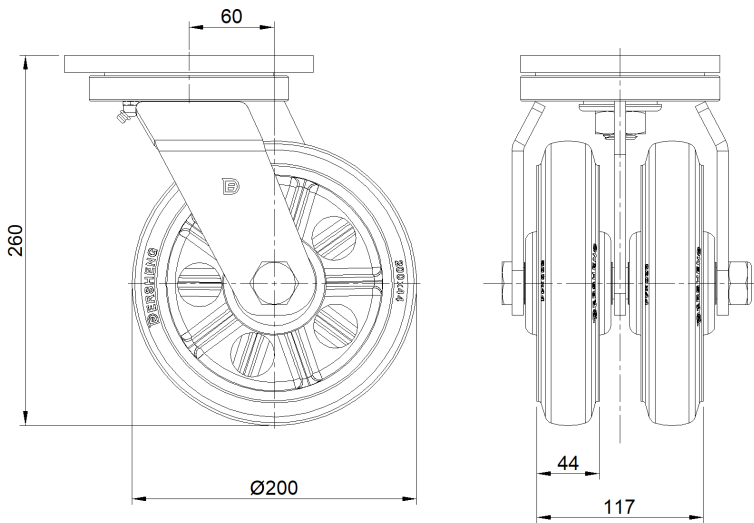

Mounting

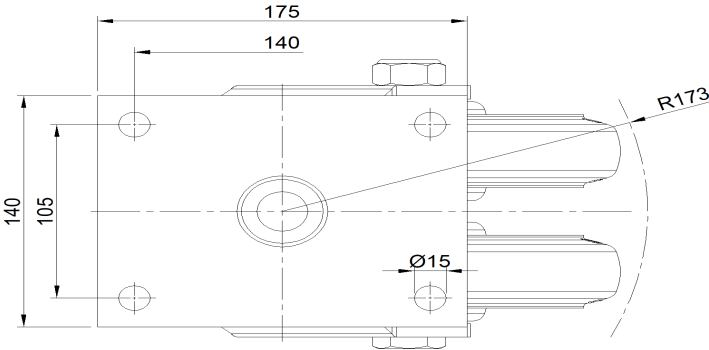

* For any deviation between metric and imperial spec, please refer to the metric spec.