



1152 Anti-Friction Caster Series

PU (red flat) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11520800334061

Castors with Front Brake locking system, Welded Caster Fork Surface spray blue paint, Top Plate installation device, Hole spacing 110x75 Cast Iron Wheel Center, high quality polyurethane Wheel Tread, Cast Iron red Bearing—Ball Bearing

Wheel tread: High quality polyurethane wheel tread  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

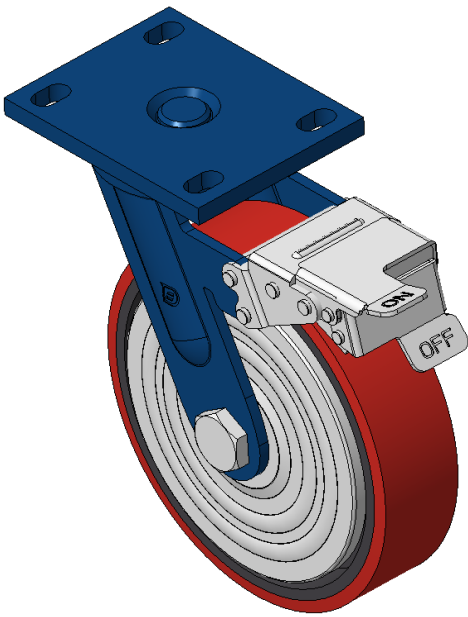

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 8 "                            |
| Wheel Width                                                            | 2 "                            |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 5-9/16 " x 4-3/8 "             |
| Bolt Hole Spacing                                                      | 4-5/16 " x3"                   |
| Plate Hole                                                             | 7/8 " x 9/16 "                 |
| Offset                                                                 | 2-1/2 "                        |
| Swivel Interference                                                    | 14-1/2 "                       |
| Overall Height                                                         | 9-15/16 "                      |
| Swivel Radius                                                          | 7-3/8 "                        |
| Hardness Of Tread                                                      | 93±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 904lbs                         |
| Load Capacity (Static)                                                 | 1356lbs                        |
| Temperature                                                            | -4°F to +158°F                 |
| Fork Type                                                              | Swivel Caster With Front Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 14.2lbs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

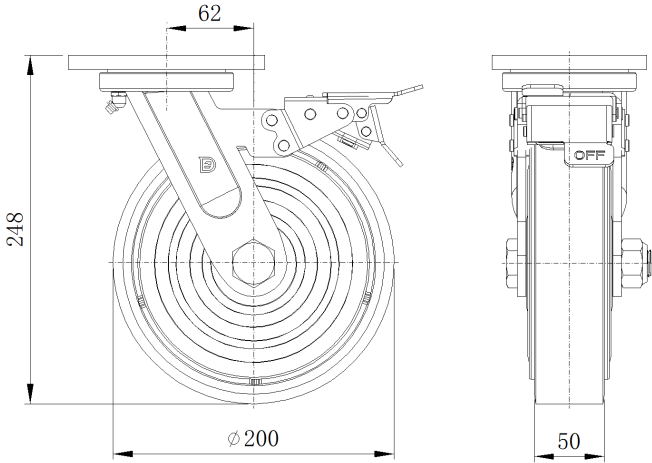

Mounting

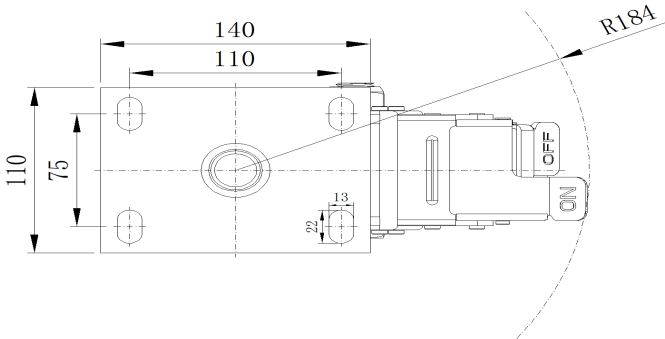

\* For any deviation between metric and imperial spec, please refer to the metric spec.