1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

PU (red flat) Wheel Diameter x Wheel Width 200 x 50mm

EAN

KS-11520800334351

Rear Brake Locking system, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron red Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 200mm
Wheel Width 117mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 175 x 140mm **Bolt Hole Spacing** 140x105mm Plate Hole 15mm Offset 60mm Swivel Interference 344mm Overall Height 260mm **Swivel Radius** 172mm Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic)810kgsLoad Capacity (Static)1215kgsTemperature-20°C to +70°C

Fork Type Swivel Caster With Rear Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight13.81kgsStandardISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

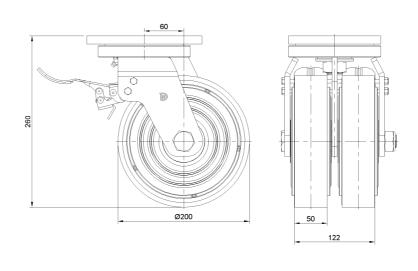

Mounting

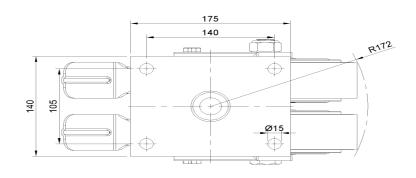

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.