# 1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11520800534361

Casters with rear brake and locking mechanism, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 8 "

Wheel Width 4-5/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 7 " x 5-9/16 "

Bolt Hole Spacing 5-1/2"x4-1/8"

Plate Hole 5/8 "

Offset 2-7/16 "
Swivel Interference 13-5/8 "
Overall Height 10-3/8 "
Swivel Radius 6-7/8 "

Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 2659lbs

Load Capacity (Dynamic) 2659lbs

Load Capacity (Static) 3175lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 30.0lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### **Dimensions**

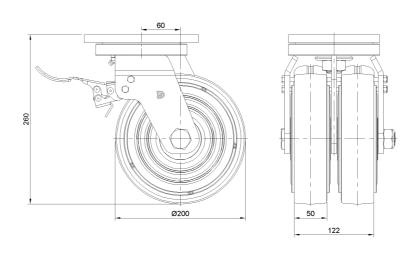

## Mounting

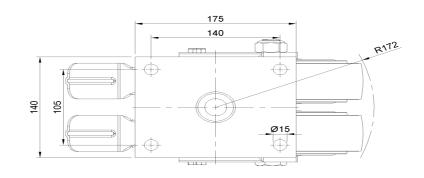

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.