1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

EQPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm

EAN


KS-11520800552341

Swivel Caster with Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown Bearing - Ball Bearing

4-7/8"

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

Wheel Diameter 8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 7 "

Bolt Hole Spacing 5-1/2"x4-1/8"

Plate Hole 5/8 "

Offset 2-7/16 "

Swivel Interference 13-3/4 "

Overall Height 8-1/2 "

Swivel Radius 6-15/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 2976lbs

Load Capacity (Static) 4464lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight31.9lbsStandardISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

Dimensions





Mounting

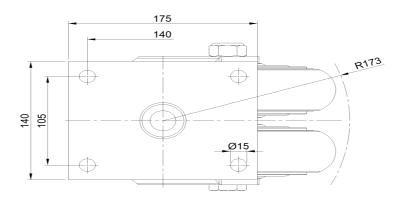

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.