



1152 Anti-Friction Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 200 x 24 (51) mm


EAN

KS-11520800804071

Casters with Front Brake locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—special Ball Bearing for reduced Rolling Resistance ZQPU dual wheels, Ergonomic design for easier starting and turning

Wheel tread: high-quality polyurethane wheel tread  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

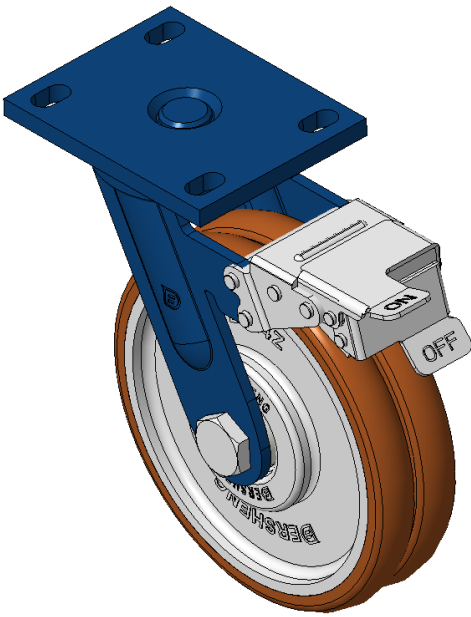

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 200mm                          |
| Wheel Width                                                            | 51mm                           |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 140 x 110mm                    |
| Bolt Hole Spacing                                                      | 110x75mm                       |
| Plate Hole                                                             | 22 x 13mm                      |
| Offset                                                                 | 62mm                           |
| Swivel Interference                                                    | 368mm                          |
| Overall Height                                                         | 248mm                          |
| Swivel Radius                                                          | 184mm                          |
| Hardness Of Tread                                                      | 92±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 650kgs                         |
| Load Capacity (Static)                                                 | 975kgs                         |
| Temperature                                                            | -20°C to +70°C                 |
| Fork Type                                                              | Swivel Caster With Front Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 7.70kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

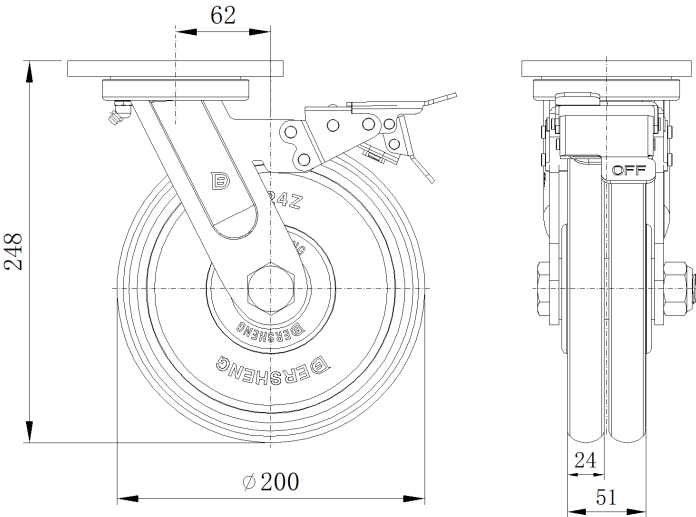

Mounting

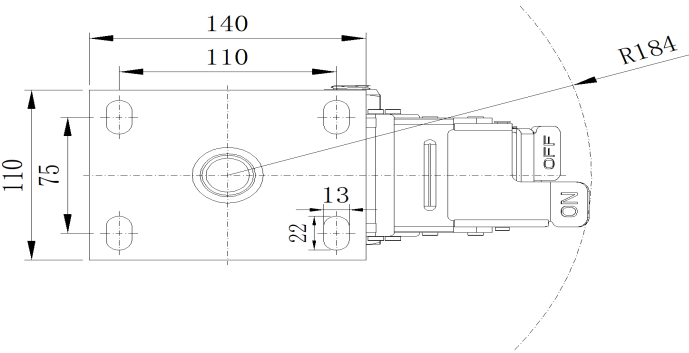

\* For any deviation between metric and imperial spec, please refer to the metric spec.