## 1152 Anti-Friction Caster Series

Dersheng Casters Keep Rolling

MRC (transparent) Wheel Diameter x Wheel Width 250 x 50mm


EAN

KS-11521000072121

Swivel Caster, Welded Caster Fork, blue paint finish Mounting Type - Top Plate, 140x85 Bolt Hole Spacing Reinforced Polypropylene, Natural Color wheel tread Bearing—Ball Bearing

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

● Metric ○ Imperial

Wheel Diameter 250mm
Wheel Width 050mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 167 x 130mm **Bolt Hole Spacing** 140x85mm Plate Hole 22 x 13mm Offset 62mm 386mm Swivel Interference Overall Height 305mm **Swivel Radius** 193mm Hardness Of Tread 75±5° Shore D Load Capacity (Dynamic) 800kgs

Load Capacity (Dynamic)

Load Capacity (Static)

1200kgs

Temperature

-20°C to +80°C

Fork Type

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 8.25kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

## **Dimensions**

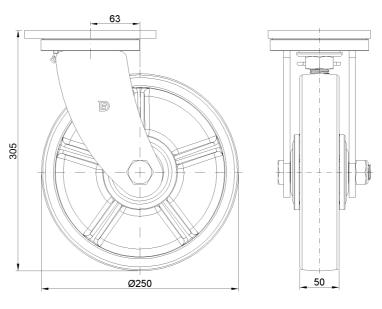

Mounting

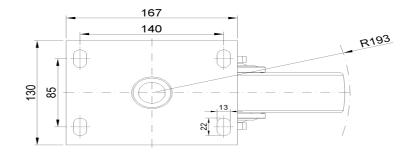

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.