



1152 Anti-Friction Caster Series

MRC (transparent) Wheel Diameter x Wheel Width 250 x 50mm


EAN

KS-11521000072121

Swivel Caster, Welded Caster Fork, blue paint finish Mounting Type - Top Plate, 140x85 Bolt Hole Spacing Reinforced Polypropylene, Natural Color wheel tread Bearing—Ball Bearing

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

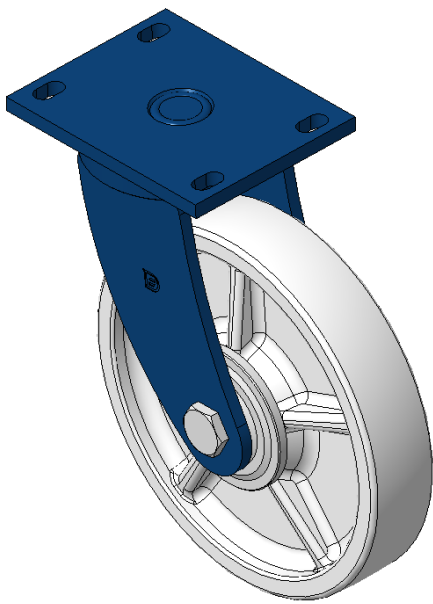

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	10 "
Wheel Width	2 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	6-5/8 " x 5-3/16 "
Bolt Hole Spacing	5-1/2 " x3-3/8 "
Plate Hole	7/8 " x 9/16 "
Offset	2-1/2 "
Swivel Interference	15-1/4 "
Overall Height	12-1/16 "
Swivel Radius	7-11/16 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	1764lbs
Load Capacity (Static)	2646lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	18.2lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

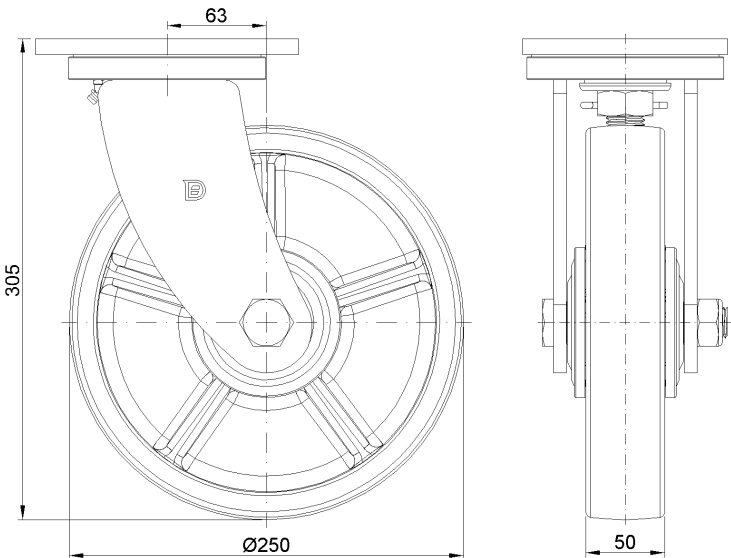

Mounting

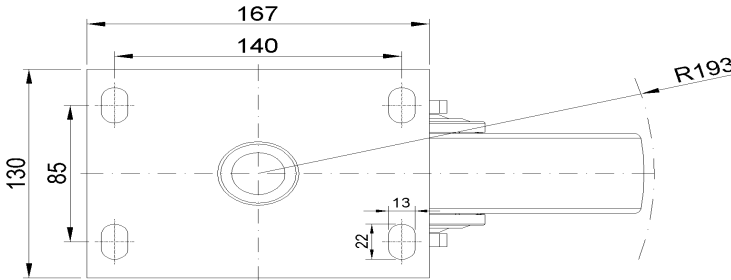

* For any deviation between metric and imperial spec, please refer to the metric spec.