



1152 Anti-Friction Caster Series

VXPU (burgundy round) Wheel Diameter x Wheel Width 250 x 62mm


EAN

KS-11521000692021

Swivel Caster with Welded Caster Fork, blue painted finish. Mounting Type - Top Plate, 140x85 Bolt Hole Spacing. Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown. Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

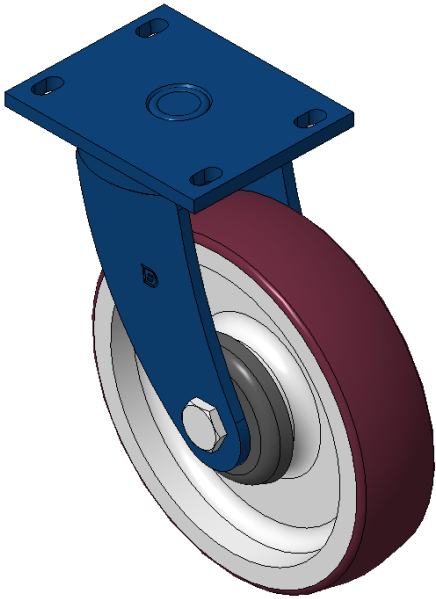

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 250mm                     |
| Wheel Width                                                            | 062mm                     |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 140 x 130mm               |
| Bolt Hole Spacing                                                      | 140x85mm                  |
| Plate Hole                                                             | 22 x 13mm                 |
| Offset                                                                 | 62mm                      |
| Swivel Interference                                                    | 386mm                     |
| Overall Height                                                         | 305mm                     |
| Swivel Radius                                                          | 193mm                     |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 1500kgs                   |
| Load Capacity (Static)                                                 | 2250kgs                   |
| Temperature                                                            | -20°C to +70°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 13.98kgs                  |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

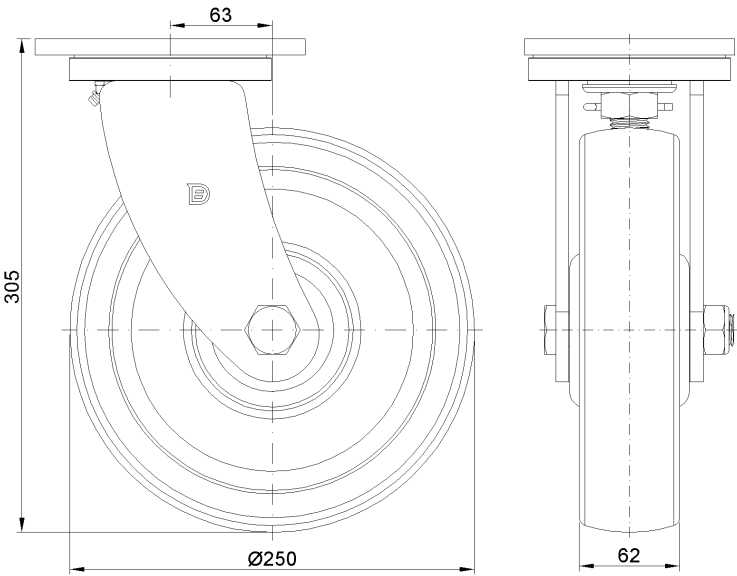

Mounting

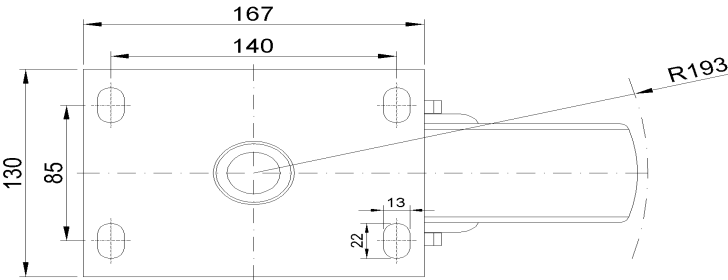

\* For any deviation between metric and imperial spec, please refer to the metric spec.