



1152 Anti-Friction Caster Series

VQPU (brown round) Wheel Diameter x Wheel Width 300 x 90mm


EAN

KS-11521200544041

Rear Brake Locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 140x85 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—precision bevel ball bearings

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

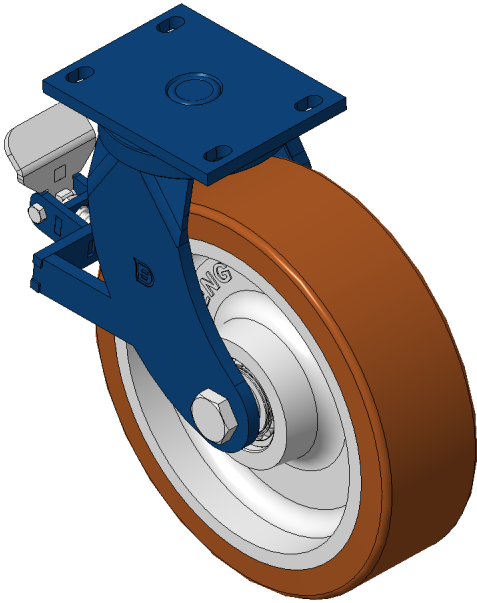

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                               |
| Wheel Diameter                                                         | 12-1/16 "                     |
| Wheel Width                                                            | 3-9/16 "                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 6-5/8 " x 5-3/16 "            |
| Bolt Hole Spacing                                                      | 5-1/2 " x3-3/8 "              |
| Plate Hole                                                             | 7/8 " x 9/16 "                |
| Offset                                                                 | 3-3/16 "                      |
| Swivel Interference                                                    | 18-3/4 "                      |
| Overall Height                                                         | 14 "                          |
| Swivel Radius                                                          | 9-1/2 "                       |
| Hardness Of Tread                                                      | 92±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 4960lbs                       |
| Load Capacity (Static)                                                 | 7441lbs                       |
| Temperature                                                            | -4°F to +158°F                |
| Fork Type                                                              | Swivel Caster With Rear Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 60.2lbs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

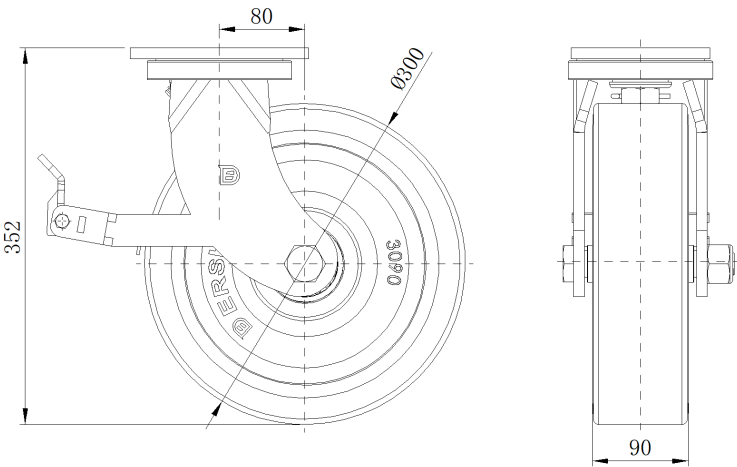

Mounting

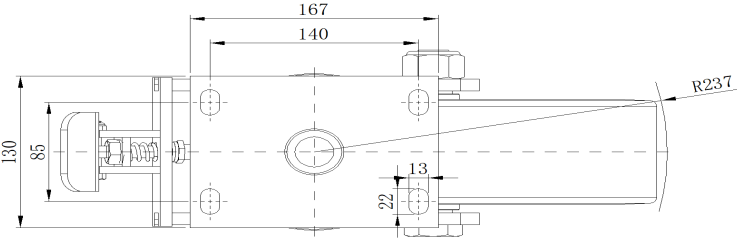

\* For any deviation between metric and imperial spec, please refer to the metric spec.