


1155-2 Light Plastic-2 Series



PPR Wheel Diameter × Wheel Width 75 x 24 mm

EAN

KS-11550303264053

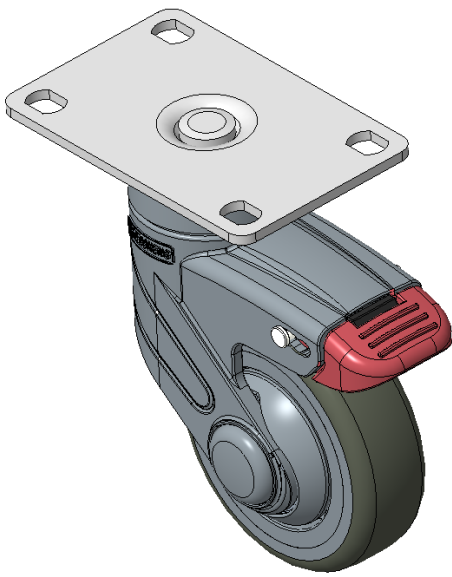

Drawings are for reference only and may differ from the product

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 75mm                      |
| Wheel Width                                                            | 24mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 94 x 62mm                 |
| Bolt Hole Spacing                                                      | 75×45mm                   |
| Plate Hole                                                             | 11.1 x 8.6mm              |
| Offset                                                                 | 32mm                      |
| Swivel Interference                                                    | 164mm                     |
| Overall Height                                                         | 120mm                     |
| Swivel Radius                                                          | 82mm                      |
| Hardness Of Tread                                                      | 82±5° Shore A             |
| Load Capacity (Dynamic)                                                | 50kgs                     |
| Load Capacity (Static)                                                 | 75kgs                     |
| Temperature                                                            | -20°C to +60°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.32kgs                   |
| Standard                                                               | ISO22881                  |


Advantages at a glance

|                            |       |
|----------------------------|-------|
| Rolling Resistance         | ●●●●○ |
| Operating Noise            | ●●●●○ |
| Floor Surface Preservation | ●●●●● |

Dimensions

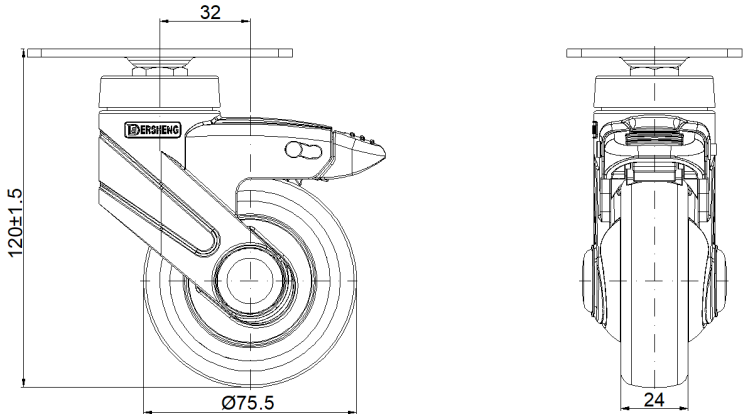

Mounting

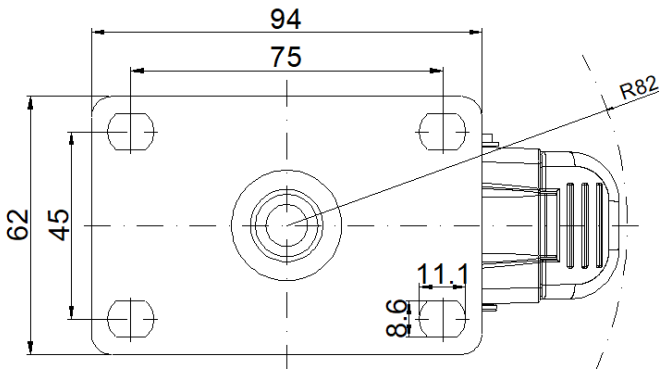

\* For any deviation between metric and imperial spec, please refer to the metric spec.