


1155-2 Light Plastic-2 Series

PPR Wheel Diameter × Wheel Width 75 x 24 mm

EAN  
KS-11550303265043

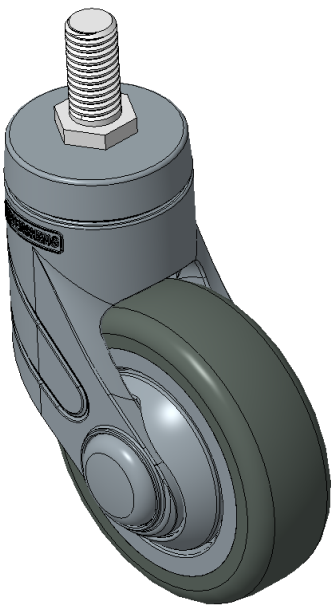

Picture may differ from original product

Drawings are for reference only and may differ from the product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 75mm                      |
| Wheel Width                                                            | 24mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Threaded Stem                                                          | M10xP1.5                  |
| Threaded Length                                                        | 20mm                      |
| Offset                                                                 | 27mm                      |
| Swivel Interference                                                    | 130mm                     |
| Overall Height                                                         | 115.3mm                   |
| Swivel Radius                                                          | 65mm                      |
| Hardness Of Tread                                                      | 82±5° Shore A             |
| Load Capacity (Dynamic)                                                | 50kgs                     |
| Load Capacity (Static)                                                 | 75kgs                     |
| Temperature                                                            | -20°C to +60°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.22kgs                   |
| Standard                                                               | ISO22881                  |


Advantages at a glance

|                            |       |
|----------------------------|-------|
| Rolling Resistance         | ●●●●○ |
| Operating Noise            | ●●●●○ |
| Floor Surface Preservation | ●●●●● |

Dimensions

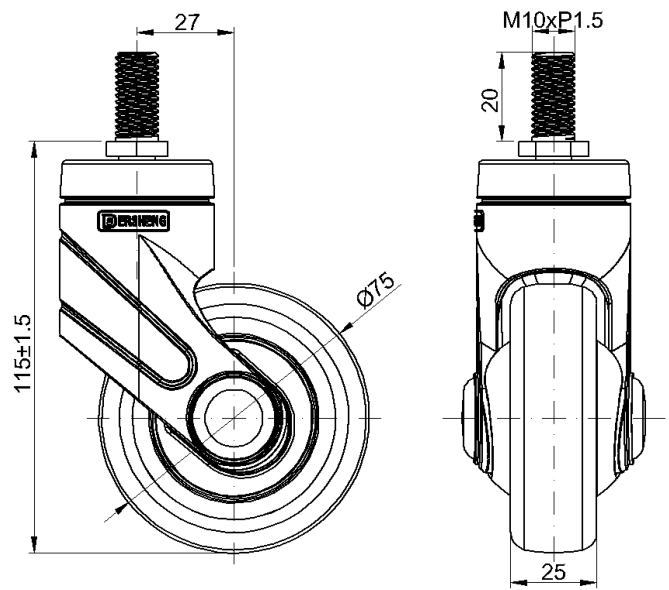

Mounting

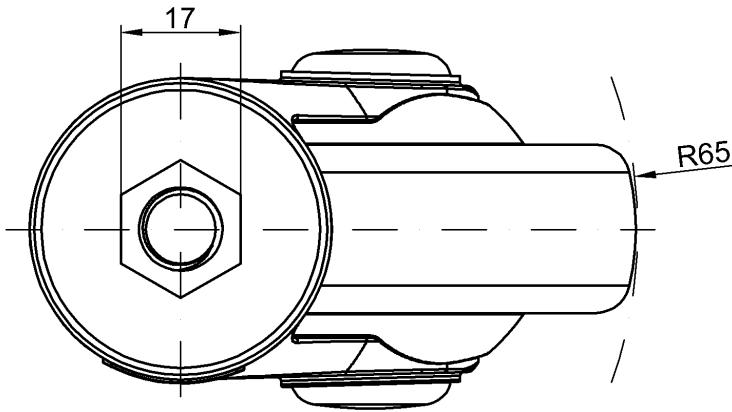

\* For any deviation between metric and imperial spec, please refer to the metric spec.