



1155 STAT Series Caster Series (All Plastic)

Resolute (blue gray) Wheel Diameter × Wheel Width 100 x 31mm


EAN

KS-11550400452013

Actual Casters, high-grade Top Plate—75x45, angled perforated Top Plate  
Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

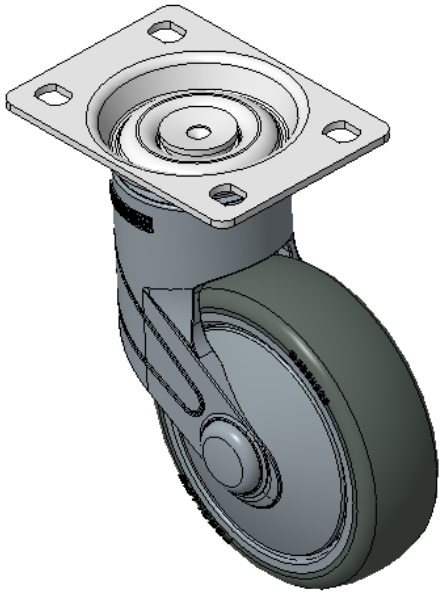

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 100mm                     |
| Wheel Width                                                            | 31mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 96 x 69mm                 |
| Bolt Hole Spacing                                                      | 75 x 45mm                 |
| Plate Hole                                                             | 11.1 x 8.6mm              |
| Offset                                                                 | 36mm                      |
| Swivel Interference                                                    | 172mm                     |
| Overall Height                                                         | 141.5mm                   |
| Swivel Radius                                                          | 86mm                      |
| Hardness Of Tread                                                      | 72±5° Shore A             |
| Load Capacity (Dynamic)                                                | 90kgs                     |
| Load Capacity (Static)                                                 | 135kgs                    |
| Temperature                                                            | -20°C to +60°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.59kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

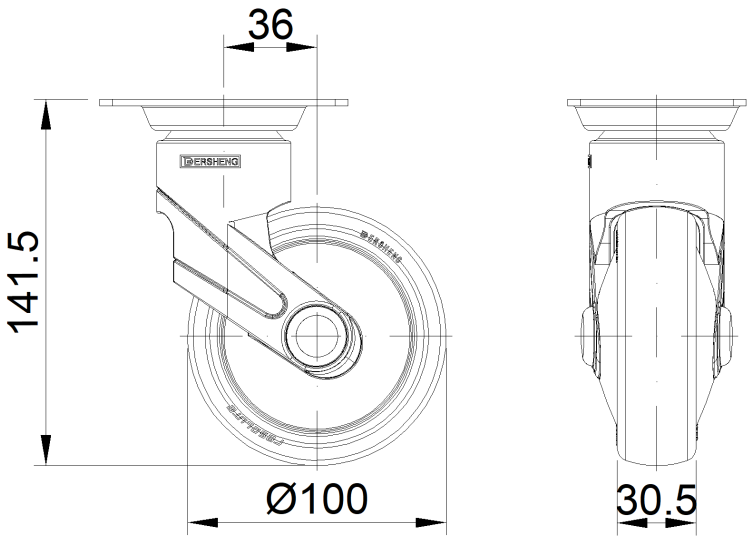

Mounting

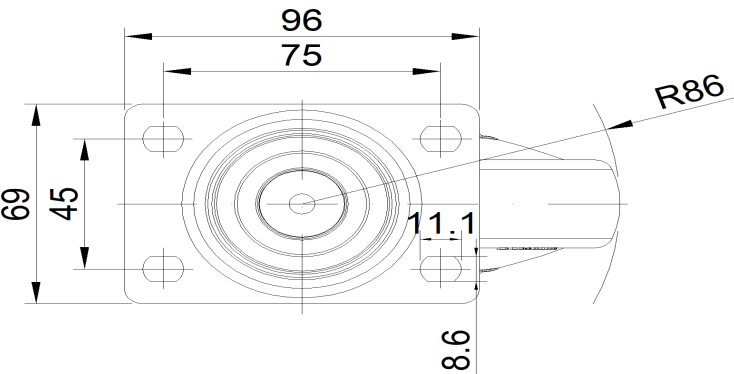

\* For any deviation between metric and imperial spec, please refer to the metric spec.