1155 STAT Series Caster Series (All Plastic)



Resolute (blue gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


KS-11550400452013

Equipped with swivel Casters, Top Plate with 75x45 Bolt Hole Spacing Blue-gray Fork with polyamide reinforcement and Mounting Type - Top Plate High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

4 "

Plate Size
Bolt Hole Spacing

Plate Hole 3/8 " x 3/8 "

Offset

1-7/16 "

3-7/8 " x 2-3/4 "

3" x 1-13/16"

Swivel Interference

6-7/8 "

Overall Height

5-9/16 " 3-7/16 "

Swivel Radius

72±5° Shore A

Hardness Of Tread

Load Capacity (Dynamic)

220 01101

Load Capacity (Static)

198lbs

Load Capacity (Ota

-4°F to +140°F

Fork Type

Temperature

Swivel Caster

N/A

298lbs

Stainless

Electrical Conductivity N/A

Anti-Static

N/A

Standard

Weight

1.3lbs ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • •

Floor Surface Preservation • • • • •

Dimensions

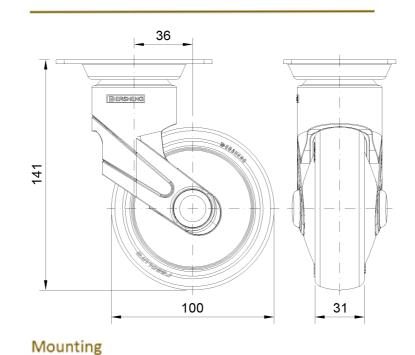

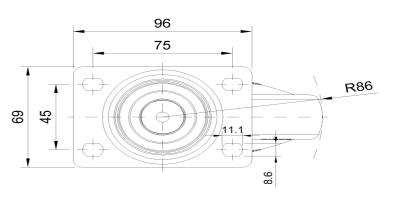

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.