1155 STAT Series Caster Series (All Plastic)

Resolute (blue gray dark gray Plain Bearing Hub Lenth 35) Wheel Diameter x Wheel Width 100 x 31mm

EAN

KS-11550400452033


Actual Casters, high-grade Top Plate—75x45, angled perforated Top Plate
Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and rotates
smoothly
High Quality Impact Posistant, Polygrapylane, Wheel Contact High Quality Poinforced

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Plate Size

Metric O Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

96 x 69mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 11.1 x 8.6mm

Offset 36mm

Swivel Interference 172mm

Swivel Interference 172mm

Overall Height 141.5mm

Swivel Radius 86mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.53kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


• • •

Floor Surface Preservation • • • • •

Dimensions

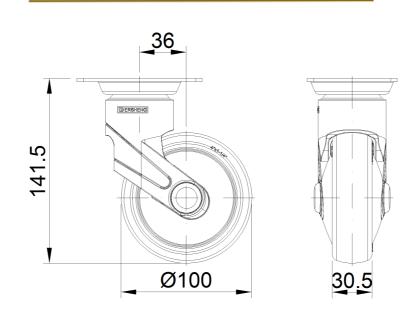

Mounting

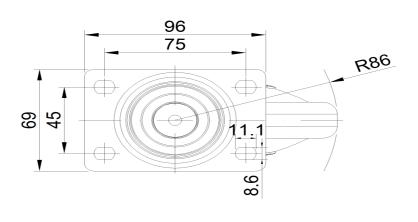

st For any deviation between metric and imperial spec, please refer to the metric spec.