1155 STAT Series Caster Series (All Plastic)

Resolute (blue gray dark gray Plain Bearing Hub Lenth 35) Wheel Diameter x Wheel Width 100 x 31mm

EAN

KS-11550400454043

Total Brake With locking system Casters, high-grade Top Plate—75x45, angled hole Top Plate

Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth


High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

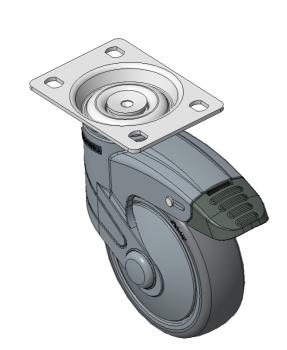

Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Swivel Interference

Standard

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 3-7/8 " x 2-3/4 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 3/8 " x 3/8 "

Offset 1-7/16 "

Overall Height 5-5/8 "

Swivel Radius 4-1/2 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

ISO22883

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.4lbs


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

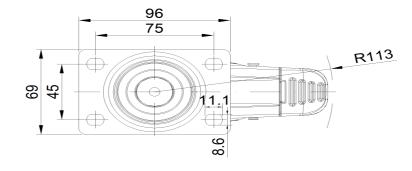

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.