1155 STAT Series Caster Series (All Plastic)

Resolute (blue gray dark gray Plain Bearing Hub Lenth 35) Wheel Diameter x Wheel Width 100 x 31mm


EAN

KS-11550400456113

Double-locking Caster system, Threaded Stem M12x25 Blue-gray legs made of polyamide reinforcement, Threaded Stem installation Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

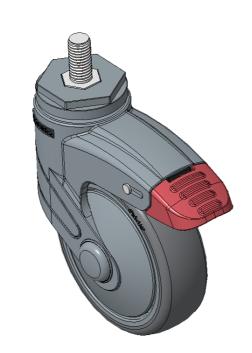

Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Metric O Imperial

Wheel Diameter 100mm Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M12 Threaded Length 25mm Offset 36mm **Swivel Interference** 226mm Overall Height 139mm **Swivel Radius** 113mm Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 90kgs Load Capacity (Static) 135kgs

-20°C to +60°C Temperature


Fork Type Swivel Caster With Total Brake


Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.61kgs Standard ISO22883

Advantages at a glance

Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

Dimensions

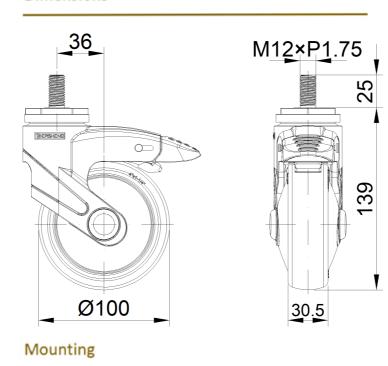



^{*} For any deviation between metric and imperial spec, please refer to the metric spec.