1155 STAT Series Caster Series (All Plastic)

Resolute (blue gray dark gray Plain Bearing Hub Lenth 35) Wheel Diameter x Wheel Width 100 x 31mm

EAN


KS-11550400456113

Double-locking Caster system, Threaded Stem M12x25
Blue-gray legs made of polyamide reinforcement, Threaded Stem installation
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for
smooth rotation
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "
Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M12

Threaded Length 1 "

Offset 1-7/16 "

Swivel Interference 9 "

Overall Height 5-1/2 "

Swivel Radius 4-1/2 "

Hardness Of Tread 72+5° Shore

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight1.3lbsStandardISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation

• • • • •

Dimensions

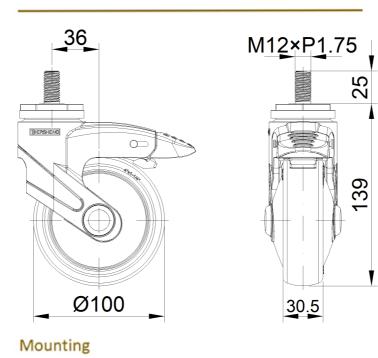



^{*} For any deviation between metric and imperial spec, please refer to the metric spec.