1155 STAT Series Caster Series (All Plastic)

Dersheng Casters Keep Rolling

Resolute (blue gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN

KS-11550400457053

Actuable Casters, rivet-type—Ø28x30L
Blue-gray legs made of polyamide reinforcement, swivel-type installation
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Metric O Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Diameter 28mm

Stem Hole Spec 30mm

Offset 36mm

Swivel Interference 172mm

Overall Height 138mm

Swivel Radius 86mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

-20°C to +60°C

Fork Type

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.54kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

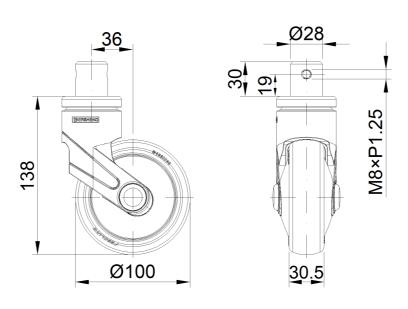

Mounting

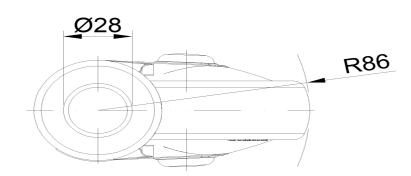

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.