1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel diameter x Wheel width 100 x 24mm

EAN


KS-11550402262123

Actual Casters, high-grade Top Plate—75x45, angled perforated Top Plate Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and rotates smoothly

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Plate Size

Metric O Imperial

Wheel Diameter 100mm Wheel Width 24mm

Wheel With Plain Bearing Wheel Bearing

96 x 69mm

Bolt Hole Spacing 75 x 45mm Plate Hole 11.1 x 8.6mm Offset 36mm Swivel Interference 172mm Overall Height 141.5mm **Swivel Radius** 86mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 50kgs Load Capacity (Static) 75kgs

Temperature -20°C to +60°C Fork Type **Swivel Caster**

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.51kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

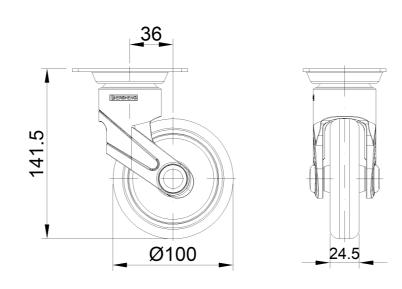

Mounting

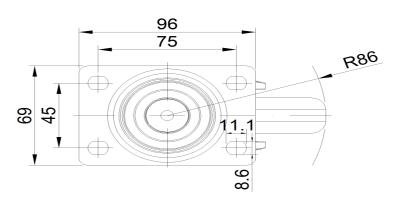

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.