## 1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 100 x 31mm

EAN

KS-11550402262143


Actual Casters, high-grade Top Plate—75x45 angled hole Top Plate Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## **Technical Data**

Metric O Imperial

Wheel Diameter 100mm Wheel Width 31mm

Wheel With Plain Bearing Wheel Bearing

Plate Size 96 x 69mm Bolt Hole Spacing 75 x 45mm Plate Hole 11 x 8.6mm Offset 36mm Swivel Interference 226mm Overall Height 141.5mm **Swivel Radius** 113mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 90kgs Load Capacity (Static) 135kgs

-20°C to +60°C Temperature Fork Type **Swivel Caster** 

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.68kgs ISO22883 Standard


## Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • •

## **Dimensions**

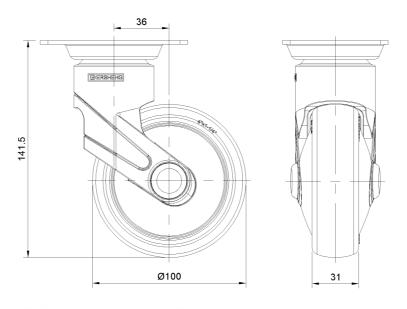

Mounting

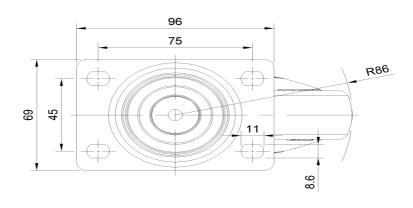

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.