1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel diameter x Wheel width

EAN

100 x 24mm

KS-11550402264123


Total Brake With locking system Casters, high-grade Top Plate—75x45, angled hole Top

Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 24mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 96 x 69mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 11.1 x 8.6mm Offset 36mm Swivel Interference 226mm **Overall Height** 141.5mm **Swivel Radius** 113mm Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 60kgs Load Capacity (Static) 90kgs

-20°C to +60°C Temperature


Swivel Caster With Total Brake Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.63kgs Standard ISO22883


Advantages at a glance

Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

Dimensions



Mounting

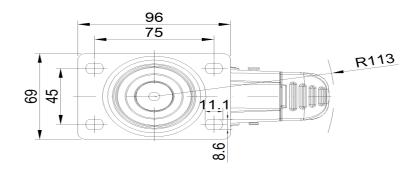

24.5

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.