1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 100 x 31mm

EAN

KS-11550402264163

Total Brake With locking system Casters, high-grade Top Plate—75x45, angled hole Top Plate

Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth


rotation
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Swivel Radius

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 96 x 69mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 11.1 x 8.6mm

Offset 36mm

Swivel Interference 226mm

Overall Height 141.5mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

113mm

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.76kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • •


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions



Mounting

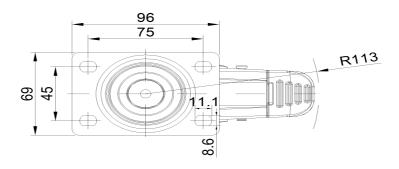

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.