



1155 STAT Series Caster Series (All Plastic)


PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 100 x 31mm

EAN  
KS-11550402265283

Swivel Casters, round cap Threaded Stem M12x25  
Gray legs made of polyamide reinforced material  
Rust-proof, Corrosion resistant, Smooth rotation, suitable for low and medium trolleys.  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

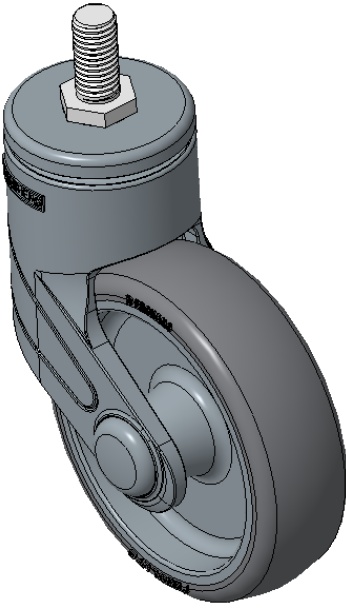

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                          |
| Wheel Diameter                                                         | 4 "                      |
| Wheel Width                                                            | 1-1/4 "                  |
| Wheel Bearing                                                          | Wheel With Plain Bearing |
| Threaded Stem                                                          | M12                      |
| Threaded Length                                                        | 1 "                      |
| Offset                                                                 | 1-7/16 "                 |
| Swivel Interference                                                    | 6-7/8 "                  |
| Overall Height                                                         | 5-1/2 "                  |
| Swivel Radius                                                          | 3-7/16 "                 |
| Hardness Of Tread                                                      | 85±5° Shore A            |
| Load Capacity (Dynamic)                                                | 176lbs                   |
| Load Capacity (Static)                                                 | 265lbs                   |
| Temperature                                                            | -4°F to +176°F           |
| Fork Type                                                              | Swivel Caster            |
| Stainless                                                              | N/A                      |
| Electrical Conductivity                                                | N/A                      |
| Anti-Static                                                            | N/A                      |
| Weight                                                                 | 1.1lbs                   |
| Standard                                                               | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

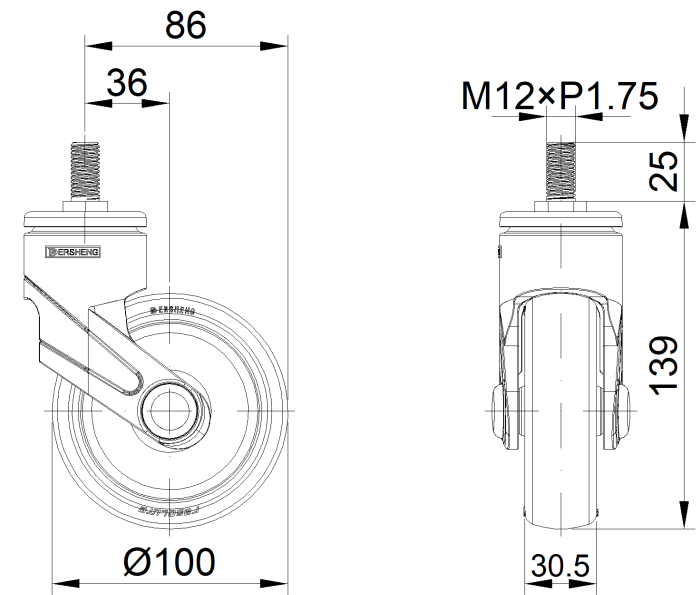

Mounting

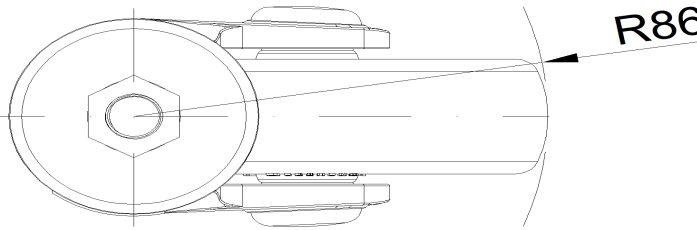

\* For any deviation between metric and imperial spec, please refer to the metric spec.