## 1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 100 x 31mm

EAN


KS-11550402268293

Total Brake With locking system Casters, pin-fitting—Ø28x30L Blue-gray legs made of polyamide reinforcement, pin-mounted installation Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## **Technical Data**

● Imperial ○ Metric

5 " Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

1-1/8 " Stem Diameter 1-3/16 " Stem Length 1-7/16 " Offset Swivel Interference 5-1/2 " Overall Height 4-1/2 " **Swivel Radius** 

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 198lbs Load Capacity (Static) 298lbs

-4°F to +140°F Temperature


Fork Type Swivel Caster With Total Brake


Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 2.0lbs ISO22883 Standard

## Advantages at a glance

Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

## Dimensions

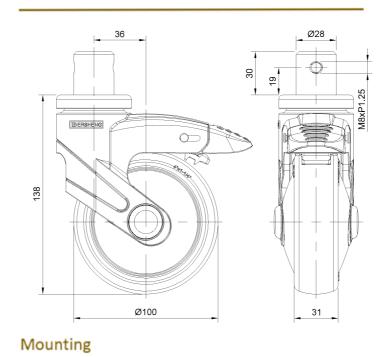

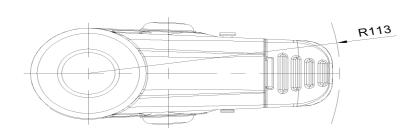

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.