1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel diameter x Wheel width 100 x 24mm

EAN

KS-11550402269173


Total Brake With locking system Casters, hollow rivets—Ø12.2 holes Blue-gray legs made of polyamide reinforcement, lock-fit installation Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Polypropylene Rubber (TPR) Wheel Tread
Dark gray, wheels—Plain Bearing

Drawings are for reference only and may differ from the product

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

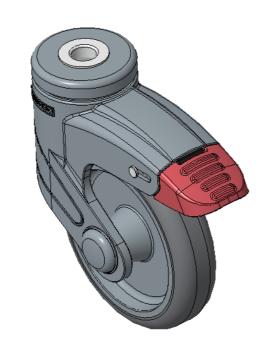

Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Metric O Imperial

Wheel Diameter 100mm
Wheel Width 24mm

Wheel Bearing Wheel With Plain Bearing

Single Bolt HoleCentre Hole 12.2mm

Offset 36mm

Swivel Interference 226mm

Overall Height 138mm

Swivel Radius 113mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 60kgs

Load Capacity (Static) 90kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.63kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

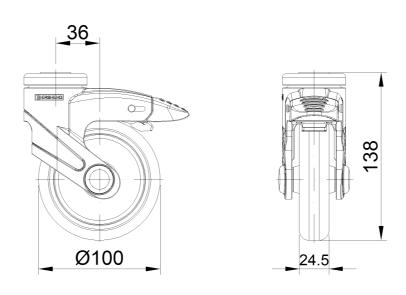

Mounting

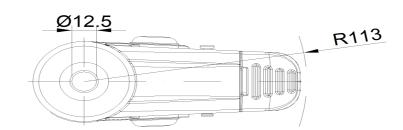

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.