1155 STAT Series Caster Series (All Plastic)

PPR (Pearl Deep Grey - Plain Bearing Hub Lenth 35) Wheel Diameter x Wheel Width 100 x 24mm

EAN


KS-11550402269193

Total Brake With locking system Casters, hollow rivets—Ø12.2 holes Pearl-colored legs made of polyamide reinforcement, lock-fit installation Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter Wheel Width

Wheel With Plain Bearing Wheel Bearing

1/2 " Single Bolt HoleCentre Hole 1-7/16 " Offset **Swivel Interference**

5-1/2 " Overall Height 4-1/2 " **Swivel Radius**

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 132lbs Load Capacity (Static) 198lbs

Temperature -4°F to +140°F


Fork Type Swivel Caster With Total Brake


Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.5lbs Standard ISO22883

Advantages at a glance


Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

Dimensions





Mounting

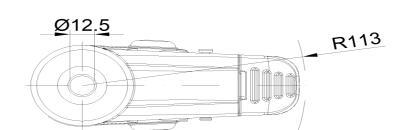

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.