1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 100 x 31mm

EAN


KS-11550402269243

Total Brake With locking system Casters, hollow rivets—Ø12.2 holes
Blue-gray legs made of polyamide reinforcement, lock-fit installation
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "
Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Single Bolt HoleCentre Hole 1/2 "

Offset 1-7/16 "
Swivel Interference 9 "
Overall Height 5-1/2 "
Swivel Radius 4-1/2 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.7lbs

Standard ISO22883


Advantages at a glance


Rolling Resistance • • • •

Operating Noise • • • • o

Floor Surface Preservation • • • • •

Dimensions

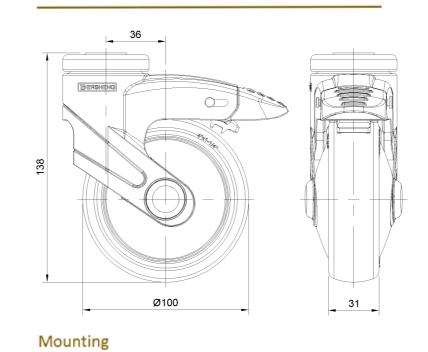



 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.