


## 1155-2 Light Plastic-2 Series

Classic PPR Wheel (Pearlescent Dark Gray) Wheel Diameter x Wheel Width 100 x 24mm

EAN

KS-11550403266073

Total Brake Casters, Threaded Stem M10x20 Blue-gray legs reinforced with polyamide, Threaded Stem installation Rust-proof, Corrosion resistant, Attractive appearance, Economical, and rotates smoothly High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Pearl-gray, bearing-type wheels, with Dust Cap

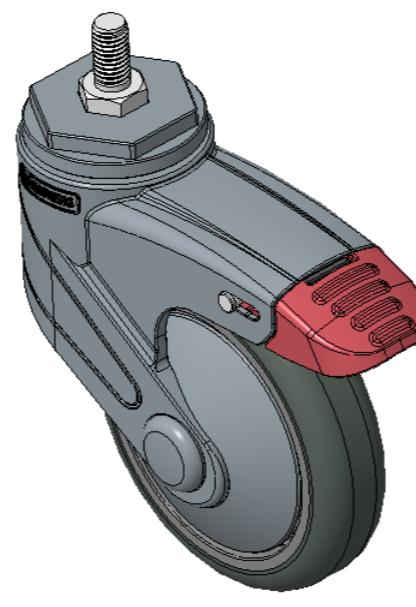

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 100mm

Wheel Width 24mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M10

Threaded Length 20mm

Offset 46mm

Swivel Interference 232mm

Overall Height 139mm

Swivel Radius 116mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 50kgs

Load Capacity (Static) 75kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.41kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • • ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • •

## Dimensions

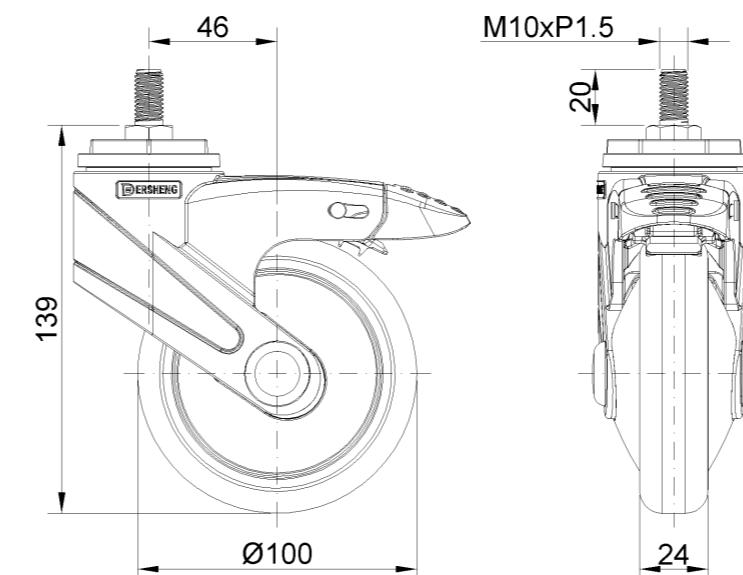

## Mounting

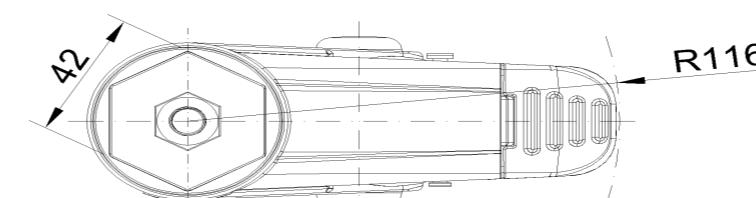

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com