



1155-1 Light Plastic-1 Series

PPR (black and black) Wheel Diameter x Wheel Width 100 x 31mm

EAN


KS-11550491261013

Rigid Casters, high-grade Top Plate—75x45 angled hole Top Plate Black legs made of polyamide reinforced material, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Black, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

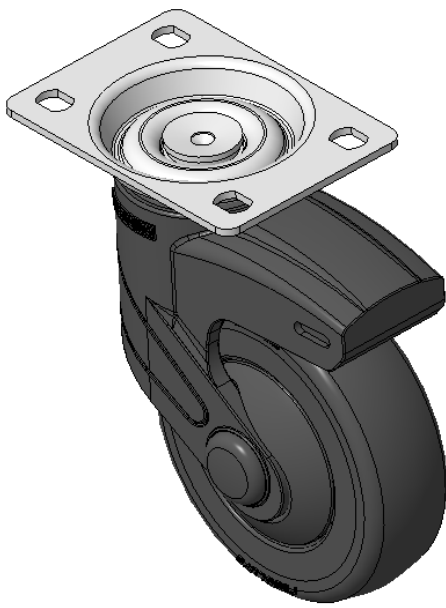

Picture may differ from original product

Technical Data


Imperial Metric

|                         |                           |
|-------------------------|---------------------------|
| Wheel Diameter          | 4 "                       |
| Wheel Width             | 1-1/4 "                   |
| Wheel Bearing           | Wheels With Ball Bearings |
| Plate Size              | 3-7/8 " x 2-3/4 "         |
| Bolt Hole Spacing       | 3 " x 1-13/16 "           |
| Plate Hole              | 3/8 " x 3/8 "             |
| Overall Height          | 5-5/8 "                   |
| Hardness Of Tread       | 82±5° Shore A             |
| Load Capacity (Dynamic) | 198lbs                    |
| Load Capacity (Static)  | 298lbs                    |
| Temperature             | -4°F to +140°F            |
| Fork Type               | Rigid Caster              |
| Stainless               | N/A                       |
| Electrical Conductivity | N/A                       |
| Anti-Static             | N/A                       |
| Weight                  | 1.4lbs                    |
| Standard                | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

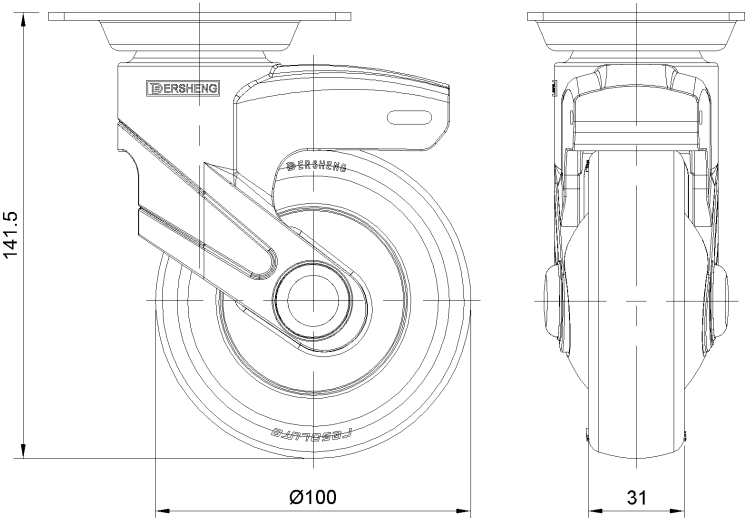

Mounting

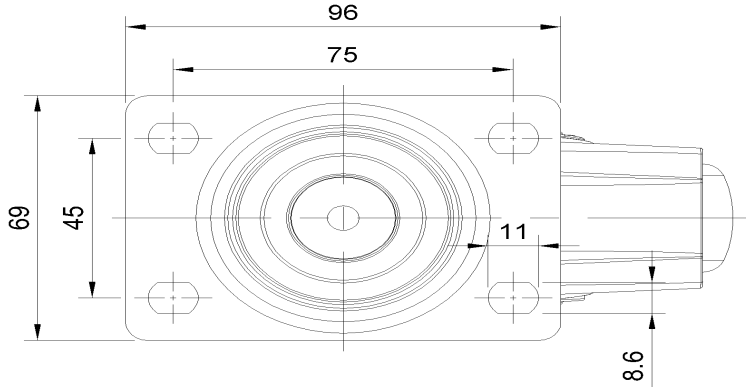

\* For any deviation between metric and imperial spec, please refer to the metric spec.