## 1155-1 Light Plastic-1 Series

PPR Wheel (Black Black - Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 100 x 24mm

EAN


KS-11550493261073

Rigid Casters, high-grade Top Plate—75x45 angled hole Top Plate Black legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Black, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 3-7/8 " x 2-3/4 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 3/8 " x 3/8 "

Overall Height 5-5/8 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 176lbs

Load Capacity (Static) 265lbs

Temperature -4°F to +140°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.2lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

## **Dimensions**

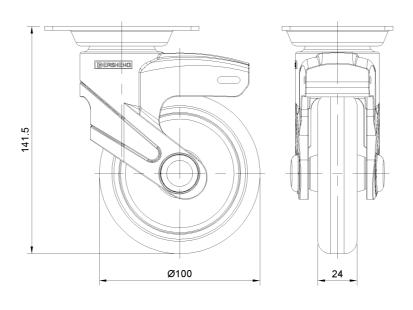

Mounting

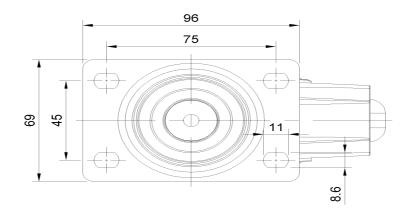

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.