



1155-1 Light Plastic-1 Series

PPR (black and black) Wheel Diameter x Wheel Width 100 x 24mm


EAN

KS-11550493262023

Actual Casters, high-grade Top Plate—75x45 angled perforated Top Plate  
Black legs made of polyamide reinforcement, Mounting Type - Top Plate  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Black, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

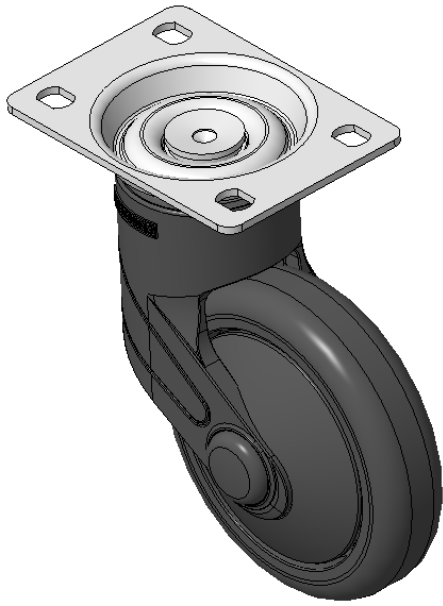

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                          |
| Wheel Diameter                                                         | 100mm                    |
| Wheel Width                                                            | 24mm                     |
| Wheel Bearing                                                          | Wheel With Plain Bearing |
| Plate Size                                                             | 96 x 69mm                |
| Bolt Hole Spacing                                                      | 75 x 45mm                |
| Plate Hole                                                             | 11 x 8.6mm               |
| Offset                                                                 | 36mm                     |
| Swivel Interference                                                    | 172mm                    |
| Overall Height                                                         | 141.5mm                  |
| Swivel Radius                                                          | 86mm                     |
| Hardness Of Tread                                                      | 82±5° Shore A            |
| Load Capacity (Dynamic)                                                | 80kgs                    |
| Load Capacity (Static)                                                 | 120kgs                   |
| Temperature                                                            | -20°C to +60°C           |
| Fork Type                                                              | Swivel Caster            |
| Stainless                                                              | N/A                      |
| Electrical Conductivity                                                | N/A                      |
| Anti-Static                                                            | N/A                      |
| Weight                                                                 | 0.55kgs                  |
| Standard                                                               | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

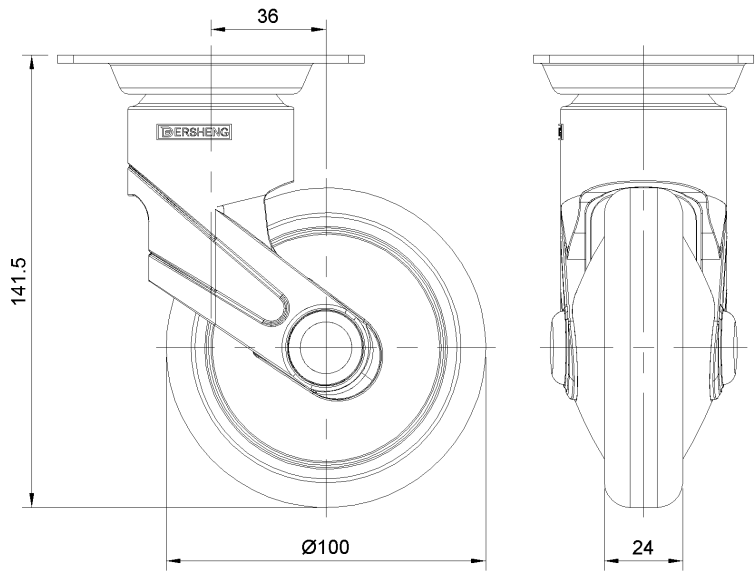

Mounting

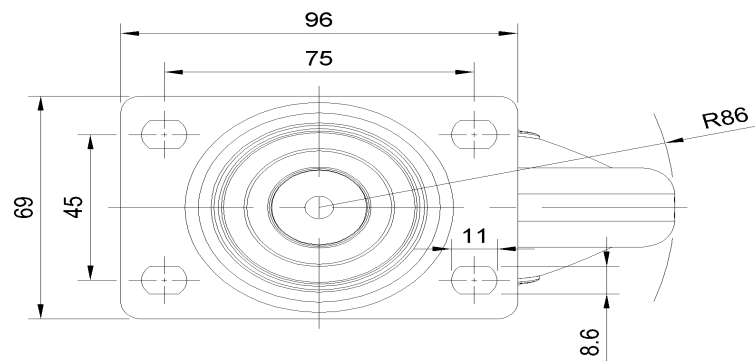

\* For any deviation between metric and imperial spec, please refer to the metric spec.