



1155-1 Light Plastic-1 Series

PPR (Black Black - Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 100 x 31mm

EAN


KS-11550493267143

Rigid Casters, pin rivets—Ø28x30L Black legs made of polyamide reinforcement, pin-mounted installation Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Black, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

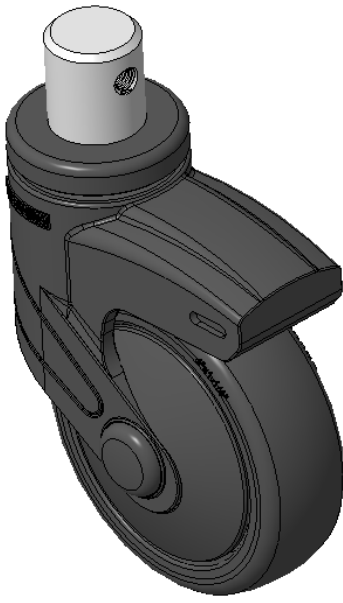

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                          |
| Wheel Diameter                                                         | 4 "                      |
| Wheel Width                                                            | 1-1/4 "                  |
| Wheel Bearing                                                          | Wheel With Plain Bearing |
| Stem Diameter                                                          | 1-1/8 "                  |
| Stem Length                                                            | 1-3/16 "                 |
| Offset                                                                 | 1-7/16 "                 |
| Overall Height                                                         | 5-1/2 "                  |
| Hardness Of Tread                                                      | 82±5° Shore A            |
| Load Capacity (Dynamic)                                                | 176lbs                   |
| Load Capacity (Static)                                                 | 265lbs                   |
| Temperature                                                            | -4°F to +140°F           |
| Fork Type                                                              | Rigid Caster             |
| Stainless                                                              | N/A                      |
| Electrical Conductivity                                                | N/A                      |
| Anti-Static                                                            | N/A                      |
| Weight                                                                 | 1.3lbs                   |
| Standard                                                               | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

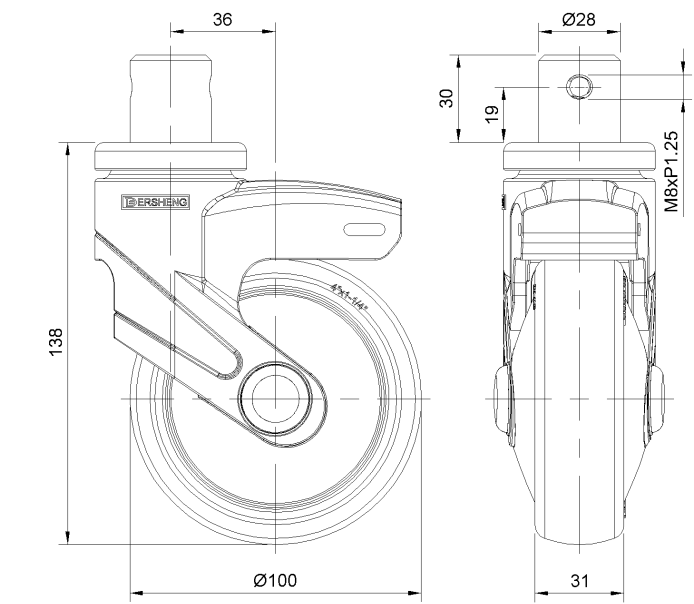

Mounting

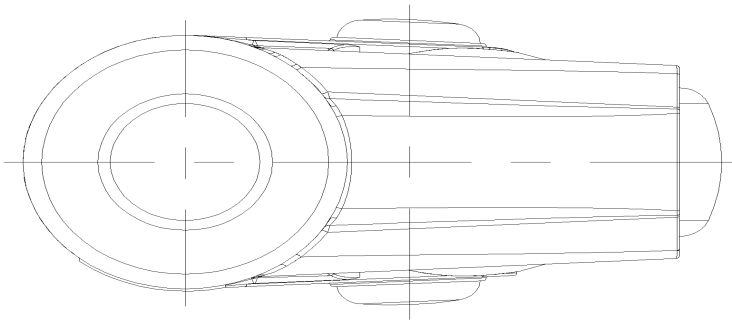

\* For any deviation between metric and imperial spec, please refer to the metric spec.