1155 STAT Series Caster Series (All Plastic)



Resolute (blue gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

KS-11550500454053

Total Brake With locking system Casters, 75x45 angled hole Top Plate Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Metric O Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 96 x 69mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 11 x 8.6mm

Offset 38mm

Swivel Interference 226mm

Overall Height 165.5mm

Swivel Radius 113mm

Hardness Of Tread 72±5° Shore

Hardness Of Tread 72±5° Shore A
Load Capacity (Dynamic) 100kgs

Load Capacity (Dynamic) 100kgs

Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.74kgs

Standard ISO22881


Advantages at a glance


Rolling Resistance • • •

Operating Noise • • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

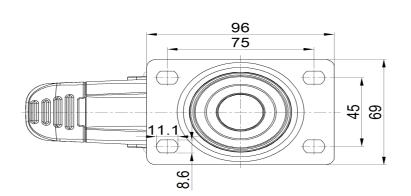

st For any deviation between metric and imperial spec, please refer to the metric spec.