# 1155 STAT Series Caster Series (All Plastic)



Resolute (blue gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

KS-11550500454053


Total Brake With locking system Casters, 75x45 angled hole Top Plate
Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

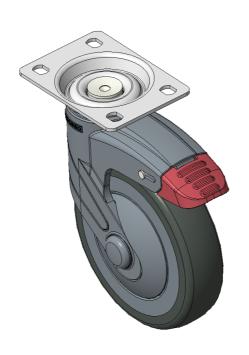

Picture may differ from original product

#### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 5 "
Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 3-7/8 " x 2-3/4 "

 Bolt Hole Spacing
 3 " x 1-13/16 "

 Plate Hole
 3/8 " x 3/8 "

 Offset
 1-1/2 "

 Swivel Interference
 9 "

 Overall Height
 6-9/16 "

Swivel Radius 4-1/2 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.6lbs

Standard ISO22881

### Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

### Dimensions





## Mounting

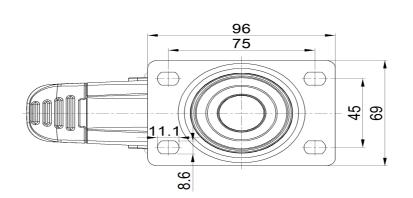

st For any deviation between metric and imperial spec, please refer to the metric spec.